



PCCP

Electrode kinetics from a single experiment: Multi-amplitude analysis in square-wave chronoamperometry

Journal:	<i>Physical Chemistry Chemical Physics</i>
Manuscript ID	CP-ART-04-2022-001888.R1
Article Type:	Paper
Date Submitted by the Author:	n/a
Complete List of Authors:	Guziejewski, Dariusz; University of Lodz, Department of Inorganic and Analytical Chemistry Stojanov, Leon; Ss Cyril and Methodius University in Skopje Faculty of Natural Sciences and Mathematics, Institute of Chemistry Zwierzak, Zuzanna; University of Lodz, Department of Inorganic and Analytical Chemistry Compton, Richard; Oxford University, Department of Chemistry Mirceski, Valentin; University of Lodz, Department of Inorganic and Analytical Chemistry; Ss Cyril and Methodius University in Skopje Faculty of Natural Sciences and Mathematics, Institute of Chemistry; Macedonian Academy of Sciences and Arts

SCHOLARONE™
Manuscripts

PCCP

Physical Chemistry Chemical Physics

Guidelines for Reviewers



Thank you very much for your agreeing to review this manuscript for [Physical Chemistry Chemical Physics \(PCCP\)](#).

PCCP is an international journal for the publication of cutting-edge original work in physical chemistry, chemical physics and biophysical chemistry, spanning experiment, theory, computation and data science. To be suitable for publication in PCCP, articles must include significant innovation and/or insight into physical chemistry; this is the most important criterion that reviewers and the Editors will judge against when evaluating submissions. Further information on our scope can be found at rsc.li/pccp.

PCCP's Impact Factor is **3.676** (2020 Journal Citation Reports®)

The following manuscript has been submitted for consideration as a
PAPER

Full papers should contain original scientific work that has not been published previously. Full papers based on Communications are encouraged provided that they represent a substantial extension of the original material. There are no restrictions on the length of a paper. Authors should include a brief discussion in the Introduction that sets the context for the new work and gives their motivation for carrying out the study.

When preparing your report, please:

- Focus on the originality, importance, impact and reliability of the science. English language and grammatical errors do not need to be discussed in detail, except where it impedes scientific understanding.
- Use the [journal scope and expectations](#) to assess the manuscript's suitability for publication in PCCP.
- State clearly whether you think the article should be accepted or rejected and include details of how the science presented in the article corresponds to publication criteria.
- Inform the Editor if there is a conflict of interest, a significant part of the work you cannot review with confidence or if parts of the work have previously been published.

Best regards,

Professor David Rueda

Editorial Board Chair
Imperial College London, UK

Dr Michael A. Rowan

Executive Editor
Royal Society of Chemistry

Contact us

Please visit our [reviewer hub](#) for further details of our processes, policies and reviewer responsibilities as well as guidance on how to review, or click the links below.



What to do
when you
review




Reviewer
responsibilities



Process &
policies

TOC and comment

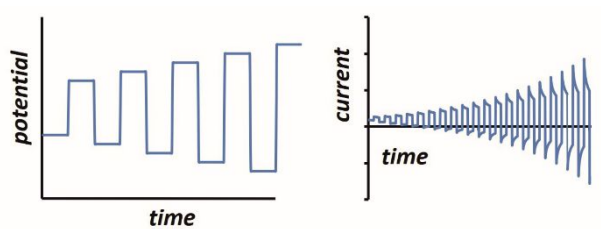

Multi-Amplitude Square-Wave Chronoamperometry – new methodology in characterization of the electron transfer within a single, simplified experiment

Electrode kinetics from a single experiment: Multi-amplitude analysis in square-wave chronoamperometry

Dariusz Guziejewski^{a*}, Leon Stojanov^b, Zuzanna Zwierzak^a, Richard G. Compton^c, Valentin Mirceski^{a,b,d*}

^a Department of Inorganic and Analytical Chemistry, University of Lodz, Tamka 12, 91-403 Lodz, Poland

^b Institute of Chemistry, Faculty of Natural Sciences and Mathematics, "Ss Cyril and Methodius" University in Skopje, P.O. Box 162, 1000 Skopje, Republic of North Macedonia

^c Department of Chemistry, Physical and Theoretical Chemistry Laboratory, Oxford University, South Parks Road, Oxford OX1 3QZ, Great Britain

^d Macedonian Academy of Sciences and Arts, Bul. Krste Misirkov 2, 1000 Skopje, Republic of North Macedonia

E-mail: dguziejewski@uni.lodz.pl, valentin@pmf.ukim.mk;

Abstract

The recently introduced technique of square-wave chronoamperometry (SWCA), is studied under conditions of progressively increasing height of potential pulses (square-wave amplitude) within a single experiment. In multi-amplitude square-wave chronoamperometry (MA-SWCA) a potential modulation consisting of square-wave forward and reverse potential pulses is imposed on a constant mid-potential; the amplitude of pulses increases progressively during the experiment. This allows the fast and reliable estimation of kinetic parameters at a constant pulse frequency in a single experiment, based on the resulting feature known as the amplitude-based quasireversible maximum. The proposed methodology is tested by simulating the responses of a simple quasireversible electrode reaction of a dissolved redox couple and a surface confined electrode reaction. Compared with conventional square-wave voltammetry (SWV) and SWCA, MA-SWCA shows advantages in estimation of the standard rate constant in terms of simplicity, speed and efficiency for both studied electrode mechanisms.

Keywords: Electrochemical Faradaic spectroscopy; Electrode kinetics; Electron transfer; Multi-amplitude analysis; Square-wave voltammetry; Voltammetry

1. Introduction

Square-wave chronoamperometry (SWCA) [1] is a simplified form of square-wave voltammetry (SWV) [2]. The potential modulation (Fig. 1A) is a train of potential pulses of a height $2E_{sw}$ (where E_{sw} is the SW amplitude) imposed over a constant mid-potential (E_m), whereas the current is measured at the end of each potential pulse, resulting in forward, backward (reverse) and differential (net) chronoamperometric current components (Fig. 1B). The technique, which finds its similarity with early works of Smit and Wijnen [3], is derived from SWV by replacing the underlying staircase potential of SWV with a constant mid-potential. In a quest for methodological advancing of voltammetric techniques [4, 5] in analytical, mechanistic and electrode kinetics contexts, SWCA has been introduced for the purpose of simplification of SWV and belongs to the group of recently introduced novel techniques derived from SWV [6-8].

While SWCA cannot be realistically applied for the initial mechanistic study of an unknown electrode reaction, it provides advantages for analytical application [9]. Specifically, the net chronoamperometric current component gains a shape typical for a steady-state electrode process, regardless of the electrode dimensions (micro or macroscopic electrode) and the type of electrode reaction (surface confined or diffusion affected, Fig. 1B). Aiming to study electrode kinetics the main tool in hand is the duration of potential pulses (t_p), or in terms of SWV, the SW frequency (f) defined as $f = 1/\tau = 1/(2t_p)$, where $\tau = 2t_p$ is the duration of a single potential cycle composed of two adjacent pulses (cf. Fig. 1A). The electrode reaction is commonly studied by varying the SW frequency; thus, the technique can be understood as an electrochemical Faradaic spectroscopy, keeping in mind that the current measured at the end of each potential pulse extracts mainly the Faradaic component of the response as common in the pulse voltammetry [10]. The corresponding frequency spectrum of the current components is highly sensitive to the electrode kinetics and the type of the electrode mechanism, as exemplified in Fig. 1C, where the net current is presented as a function of the frequency, for three different electrode mechanisms.

Beyond the basic form of the technique (Fig. 1A) it is easy to envisage a variant in which the duration of the potential pulses can progressively decreases (i.e., the SW frequency increases) in the course of a single SWCA experiment. Accordingly, a multi-frequency analysis

has been proposed in our recent study [11], which enables inspection of the electrode reaction at different frequencies in a course of a single experiment, thus revealing the electrode kinetic parameters in a fast and efficient procedure. Such an approach, besides being useful in studying electrode kinetics in general, is expected to be beneficial for application with electrochemical sensors as well; for instance, affinity-based biosensors with “signalling-off” interrogation operate due to the variation of the electrode kinetics as a result of the analyte attachment to a redox-labelled, surface-immobilized probe [12, 13]. Here it is worth mentioning that other sophisticated methods for complete electrode characterization in a single experiment can be found in the works of merit of Bond et al. on the Fourier transformed ac voltammetry [14, 15] as well as in other studies [16-19]. Particularly appealing is the recent technique with non-triangular potential variation in cyclic voltammetry which enables conduction of a single experiment with a series of scan rates [20].

In the present study we expand further the idea of multi-frequency analysis [11], testing the application of SWCA under conditions of a multi-amplitude variation in a single experiment (Fig. 1D). It is worth mentioning that the amplitude is a powerful tool in conventional SWV, as demonstrated in a series of studies over the last decades [21-23]. Variation of the amplitude in SWV provides a means to measure the electrode kinetics at a constant scan rate of the voltammetric experiment, which is beneficial when complex electrode mechanisms are studied, the voltammetric response of which depends on several frequency-dependent parameters [24]. Moreover, the experiments at a constant SW frequency are also beneficial as the effect of frequency-related uncompensated resistance is significantly reduced [25]. Thus, a multi-amplitude variant of square-wave chronoamperometry (MA-SWCA) is proposed as shown in Fig. 1D, where the height of potential pulses progressively enhances during the experiment. Based on numerical simulations it will be demonstrated that the proposed technique provides an insight into the electrode kinetics of both quasireversible electrode reaction of a dissolved redox couple at a macroscopic planar electrode and the surface confined, diffusion free electrode reaction. The proposed approach replaces a series of repetitive experiments in SWV conducted at different amplitudes with a single experiment with MA-SWCA to provide an insight into the electrode kinetics. Such multiparameter analysis in a single experiment is of general importance in the context of electrochemical sensor application and solid electrode electrochemistry in general, where the electrode surface is a subject of constant variation in the process of cleaning and

renewing the electrode surface, thus rigorously speaking, repeating the experiment under identical conditions is *a priori* impossible.

The applicability of the proposed methodology has been partly tested by experiments conducted with the $[\text{Fe}(\text{CN})_6]^{4-}/[\text{Fe}(\text{CN})_6]^{3-}$ redox couple at a glassy carbon electrode (GCE) as a model for a quasireversible electrode reaction of a dissolved redox couple [26], and azobenzene/hydrazobenzene couple immobilized on the mercury electrode surface, as a model for quasireversible surface confined electrode reaction [27].

2. Details on electrode mechanisms and simulation procedure

A quasireversible one-electron electrode reaction is considered (eq. 1). The redox couple consists of two chemically stable species dissolved in the electrolyte solution (sol) and the electrode reaction takes place at a macroscopic planar electrode.




For the sake of simplicity, the charge of the species in eq. (1) is omitted. The electrode kinetics is described with a Butler-Volmer kinetic model, attributed with the standard rate constant k_s (cm s^{-1}) and anodic electron transfer coefficient α . At the beginning of the experiment, only Red species are present in the solution at the bulk concentration of c_R^* . For the sake of simplicity, the diffusion coefficient (D) of both Red and Ox is assumed to be equal. All other details of the model are given in [2]. For numerical simulations eq. (2) was applied, which was derived following the step function method [28].

$$\psi_m = \frac{\kappa \exp(\alpha \phi_m) \left\{ 1 - \frac{2[1 + \exp(-\phi_m)]}{\sqrt{50\pi}} \sum_{j=1}^{m-1} \psi_j S_{m-j+1} \right\}}{1 + \frac{2\kappa \exp(\alpha \phi_m)}{\sqrt{50\pi}} [1 + \exp(-\phi_m)]} \quad (2).$$

Here, $\psi = \frac{I}{FAc_R^* \sqrt{Df}}$ is the dimensionless current, A is the electrode surface area, $\phi = \frac{F}{RT} (E - E^{\circ'})$ is the dimensionless electrode potential defined versus the formal potential of the electrode reaction ($E^{\circ'}$), $S_m = \sqrt{m} - \sqrt{m-1}$ is the numerical integration parameter, and m is the serial number of time increments. The time increment is defined as $d = \frac{1}{50f}$, which

means that each potential pulse is divided into 25 equal time increments. In addition, $\kappa = \frac{k_s}{\sqrt{Df}}$ is the electrode kinetic parameter, and other symbols have their common meaning.

A surface confined electrode reaction is described by the following equation:



where the abbreviation (ads) implies immobilization of the species on the electrode surface by adsorption, although the adsorption is not the only means of immobilization. The redox species are associated with their surface concentration Γ , which is a function of time. At the beginning of the experiment, only the Red form is present on the electrode surface, with a surface concentration $\Gamma_R = \Gamma^*$. No lateral interactions are assumed between immobilized species. Butler-Volmer kinetics is assumed with a surface standard rate constant k_{sur} in units of s^{-1} . The numerical solution reads [2]:

$$\psi_m = \frac{\omega \exp(\alpha \phi_m) \left(1 - \frac{1 + \exp(-\phi_m)}{50} \sum_{j=1}^{m-1} \psi_j \right)}{1 + \frac{\omega \exp(\alpha \phi_m)}{50} (1 + e^{-\phi_m})} \quad (4),$$

where the dimensionless current is $\psi = \frac{I}{nFA\Gamma^*f}$, $\omega = \frac{k_{\text{sur}}}{f}$ is the dimensionless electrode kinetic parameter, $\phi = \frac{nF}{RT}(E - E^{\circ'})$ is dimensionless potential, and n is the stoichiometric number of electrons in eq. (3).

All simulations under conditions of MA-SWCA are conducted at the mid-potential equal to the formal potential $E_m = E^{\circ'}(\text{Ox/Red})$ by gradually increasing the amplitude, commonly from 10 to 300 mV. All simulations are performed by the commercial computer package MATHCAD 14 with a minimum hardware requirements of a Pentium 32-bit (x86) processor - 400 MHz and 256 MB of RAM.

3. Experimental

A multi-Autolab potentiostat model M101 controlled by the Nova software (v. 2.1.4, both Metrohm Autolab B.V.) was used to conduct all experiments. A hanging mercury drop

electrode (HMDE; MTM Anko Instruments, Poland, surface area 0.00102 cm^2) was the working electrode for the experiments with azobenzene, whereas a glassy carbon electrode was used for the experiments with the hexacyanoferrate redox system. In both cases Ag/AgCl (3 mol/L KCl) was used as a reference electrode and a platinum wire was used as a counter electrode. All experiments were conducted at room temperature.

All chemicals were of analytical grade purity (Merck, Sigma-Aldrich or POCh), while solutions were prepared with deionized water obtained with Polwater DL-3 purification system. 1 mmol/L stock solution of azobenzene was prepared by dissolving in methanol. Britton-Robinson buffers at different pH values were used as supporting electrolytes for experiments with azobenzene. The stock solutions of $\text{K}_4[\text{Fe}(\text{CN})_6]$ and $\text{K}_3[\text{Fe}(\text{CN})_6]$ were prepared by dissolving in water, while 0.1 mol/L KNO_3 solution was used as a supporting electrolyte.

As the MA-SWCA technique is not provided by the instrumentation, experiments were conducted by designing a series of subsequent double-step chronoamperometric protocols in Nova software in which the amplitude of the pulses was progressively increased from 2 to 200 mV for each potential cycle of a given duration (i.e., given frequency of the MA-SWCA experiment). In the chronoamperometric experiment the current sampling was conducted in the course of the whole duration of each potential pulse; specifically, each potential pulse consisted of 30 measurement current points, where the last one was used to construct the outcome of the experiment. Rigorously speaking, this way of sampling the current is not identical as in other pulse techniques that are already provided by the instrumentation, so scattering of experimental data relative to the theoretical expectations are plausible. However, for the purpose of this study, designing a series of subsequent double-step chronoamperometric protocols emulating the potential variation in MA-SWCA is sufficient. Conventional SWV with corresponding parameters was also applied in parallel to the chronoamperometric measurements. In azobenzene experiments accumulation of the redox probe at 0.0 V, followed by a 10 s quiescent period, was performed prior applying potential modulation in MA-SWCA or conventional SWV.

4. Results and discussion

4.1 Theoretical data

A typical chronoamperometric response, showing the current variation over the whole duration of potential pulses of the MA-SWCA virtual experiment is shown in Fig. 2A, where the dimensionless current is plotted as a function of the serial number (m) of time increments (i.e., time of the experiment). The simulations correspond to a typical quasireversible electrode reaction characterized with the electrode kinetic parameter $\kappa = 0.1$ and the anodic electron transfer coefficient $\alpha = 0.5$. Note that from the theory of SWV [2] the electrode kinetic parameter is defined as $\kappa = k_s / (Df)^{1/2}$, where k_s is the standard rate constant. The electrode kinetic parameter together with the SW amplitude are the main parameters controlling the apparent electrochemical reversibility of a given electrode reaction. The increase of the current in each subsequent potential cycle (cf. Fig. 2A) is proportional to the enlargement of the height of potential pulses, i.e., the driving force of the electrode reaction. Extracting the currents from the end of each potential pulse, the forward, reverse and net chronoamperometric components can be constructed, being presented versus the serial number (p) of potential cycles, as shown in Fig. 2B. Each current component has a sigmoid shape, where the increasing part of the curve reflects the effect of the electrode kinetics. Clearly, replacing the serial number of potential cycles with the corresponding amplitude value, one can consider the outcome of the experiment in a voltammetric context, while the shape of the curves remains the same as in Fig. 2B. Thus, the upper plateau of the forward and net components (and the lower plateau of the reverse component) corresponds to the large amplitude values, when the electrode reaction is dominantly controlled by the diffusion rate.

Following the methodology developed in our previous study [29], the most convenient way of presenting the data is in the form of amplitude normalized net current ($\Psi_{\text{net}}/E_{\text{sw}}$) as a function of the logarithm of the amplitude (Fig. 2C). The corresponding function has an approximately parabola-like shape, the maximum of which is sensitive to the electrode kinetics, as can be inferred from Fig. 2C. As the maximum is associated with the quasireversible kinetic region, the latter function is conveniently termed the *amplitude-based quasireversible maximum* [29]. Let us note that for a given frequency and diffusion coefficient, the variation of κ presented in Fig. 2C corresponds to the variation of the standard rate constant. The parameter $\Psi_{\text{net}}/E_{\text{sw}}$ can be understood as a primitive first derivation of the function Ψ_{net} vs. E_{sw} , reflecting the slope of the linear part of the function, which depends on

the standard rate constant [29]. Importantly, as shown in Fig. 2D, the amplitude-based quasireversible maximum can be obtained under conditions of both conventional SWCA and MA-SWCA. For the conventional SWCA the virtual experiment is repeated for each amplitude value, whereas in MA-SWCA the amplitude-based quasireversible maximum is measured by conduction of a single experiment. Including simulations with conventional SWV, Fig. 2D shows that the position of the maximum is identical for all three techniques, clearly revealing that kinetic measurements in a single experiment with MA-SWCA are reliable.

The outcome of the MA-SWCA experiment is predominantly controlled by the SW frequency and amplitude of the pulses regardless of the overall duration of the experiment, provided that $E_m = E^{\phi'}(\text{Ox/Red})$. For instance, increasing the amplitude over the interval from 13 to 300 mV with an increment of 6 mV, where the total number of potential cycles is $p = 50$, the position of the maximum is located at the critical amplitude of $(E_{\text{sw}})_{\text{max}} = 150$ mV (for $\kappa = 0.1$). Repeating the simulations by lowering the amplitude increment and thus increasing the total number of potential cycles to 100 and 500, the position of the maximum remains at the same critical amplitude of $(E_{\text{sw}})_{\text{max}} = 150$ mV, clearly implying that chronoamperometric characteristics of the system dictated by the overall duration of the experiment are insignificant (Fig. S1).

On the other hand, the position of the maximum is sensitive to the electron transfer coefficient (α), as shown in Fig. 3A. Thus, α has to be previously known in order to estimate the standard rate constant by means of the amplitude-based quasireversible maximum. A possible approach for estimation of α with the current technique is to consider the MA-SWCA experiment in a voltammetric context. Specifically, the forward current component (ψ_f) can be analysed as a function of the SW amplitude in a Tafel-like analysis, as presented in Fig. 3B. The function $\ln(\psi_f)$ vs. E_{sw} has a linear part, the slope of which is sensitive to the electron transfer coefficient (Fig. 3B). The relationship between the slope value (m / V^{-1}) and electron transfer coefficient α for amplitude values of $20 \text{ mV} \leq E_{\text{sw}} \leq 60 \text{ mV}$ is represented by the following linear function: $\alpha = 0.062m - 0.426$; $R^2 = 0.9817$ (this equation is valid for transfer coefficient of $0.3 \leq \alpha \leq 0.7$ and other parameters as in Fig. 3). In Fig. 3B the slope values for $\alpha = 0.30$ (**1**); 0.5 (**2**) and 0.70 (**3**) are 11.43 ; 15.15 and 17.76 V^{-1} , respectively. These values slightly deviate from the values (11.68 ; 19.46 and 27.25 V^{-1}) in the classical Tafel analysis (i.e.,

$\alpha F/(RT)$) as the experiment is conducted with short potential pulses that do not allow steady-state conditions in the system at the end of the potential pulses.

In addition, as implicit in the previous study [29], the electrode kinetics of surface confined electrode processes can be studied by variation of the SW amplitude in conventional SWV. A similar methodology can be applied in both conventional SWCA and MA-SWCA, as shown by the data summarized in Fig. 4. In conventional SWCA the experiment is repeated for different amplitudes, while the net current measured at the end of the experiment is plotted versus the logarithm of the amplitude (Fig. 4A). As known from the theory of SWV for surface confined processes, transposition of the electrode reaction through the quasireversible kinetic region is associated with a parabolic variation of the net peak-current, known as the quasi-reversible maximum [30]. As previously mentioned, the apparent electrochemical reversibility of a given electrode reaction can be altered either by changing the SW frequency or by the amplitude. Thus, in SWCA conducted at a given frequency, the electrochemical reversibility is affected by the variation of the amplitude, giving rise to a well-defined, sharp, amplitude-based quasireversible maximum (Fig. 4A).

In MA-SWCA the amplitude-based quasi-reversible maximum can be measured in a single experiment, as shown in Fig. 4B. The position of the maxima for different values of the electrode kinetic parameter is identical as in conventional SWCA, confirming that MA-SWCA provides consistent data. The position of the maximum is markedly sensitive to the electrode kinetic parameter $\omega = k_{\text{sur}}/f$, i.e., to the standard rate constant $k_{\text{sur}}(\text{s}^{-1})$. As can be inferred from the inset of Fig. 4B the relation between the electrode kinetic parameter and the critical amplitude $(E_{\text{sw}})_{\text{max}}$ is exponential, and it can be transformed into a linear function in a “log-log” form as follows: $\log(\omega) = -1.975 \log(E_{\text{sw}}/V)_{\text{max}} - 2.398$. The latter equation enables estimation of the electrode kinetic parameter $\omega = k_{\text{sur}}/f$ (and thus the standard rate constant k_{sur}) by measuring the critical amplitude by means of MA-SWCA experiment conducted for a given frequency.

Importantly, the amplitude-based quasireversible maximum of surface electrode processes under conditions of MA-SWCA does not depend on the number of potential cycles (i.e., overall duration of the experiment) and slightly depends on the electron transfer coefficient. More specifically, for $0.35 \leq \alpha \leq 0.65$, the maximum is located at $(E_{\text{sw}})_{\text{max}} = 98 \pm 2$ mV for $\log(\omega) = -0.4$. Beyond this interval the position of the maximum is affected slightly by

the electron transfer coefficient α , which is consistent with previous findings [29]. This is a particularly important finding demonstrating that the position of the amplitude-based quasireversible maximum can be used for determination of the standard rate constant without previous knowledge of the electron transfer coefficient, considering that most frequently the electron transfer coefficient of surface electrode reactions is within the above given interval.

4.2 Experimental data

The one-electron electrode reaction of the redox couple $[\text{Fe}(\text{CN})_6]^{3-}/[\text{Fe}(\text{CN})_6]^{4-}$ serves as a representative for a quasireversible process of a dissolved species uncomplicated with either adsorption or coupled chemical reactions. The experiments have been conducted in the presence of both $[\text{Fe}(\text{CN})_6]^{3-}$ and $[\text{Fe}(\text{CN})_6]^{4-}$ redox species at equal concentration of 0.25 mmol/L. It should be however noted that the electrode reaction of hexacyanoferrate system is highly susceptible to the type of the electrode and the state of the electrode surface in particular when the carbon type electrode is used [26], as well as the concentration and composition of the supporting electrolyte, where the type of both cations [31] and anions [26] play a critical role in the electrode kinetics. In spite of the non-ideal behaviour of the hexacyanoferrate system, it is an attractive system for electrode characterization as it is readily available in pure form, stable in many solvents, providing reasonably well-defined electrochemical behaviour. Increasing the concentration of the supporting electrolyte (e.g., an aqueous electrolytes containing K^+ ions) the kinetics of the electrode reaction increases from quasireversible to typical reversible behaviour at macroelectrodes [32]. Most frequently, under experimental conditions of the current study (0.1 mol/L KNO_3 aqueous solution at a glassy carbon macroelectrode) the electrode reaction is electrochemically quasireversible [24].

First the features of the electrode reaction were briefly studied by conventional SWV. Over the frequency interval from 20 to 400 Hz, the SW net peak-current ($I_{p,\text{net}}$) is a linear function of the square root of the frequency, while the net peak potential is almost constant with an average value of 0.230 V, which is typical for the upper quasireversible region, close to the reversible voltammetric behaviour [2]. The function $I_{p,\text{net}}f^{-0.5}$ vs. $\log(f^{-0.5})$, which corresponds to the expected theoretical relation of the dimensionless net peak-current ($\Psi_{p,\text{net}}$) vs. $\log(\kappa)$ (κ is the electrode kinetic parameter), increases steadily,

confirming that the rate of the electrode reaction is within the quasireversible kinetic region [33]. Studying the electrode reaction by varying the SW amplitude in conventional SWV a well-developed amplitude-based quasireversible maximum was obtained, shown in Fig. 5A (asterisks). Fitting the experimental results with the theoretical one, the standard rate constant of $k_s = 5.0 \times 10^{-3} \text{ cm s}^{-1}$ was estimated, assuming a common diffusion coefficient of $D = 5 \times 10^{-6} \text{ cm}^2 \text{ s}^{-1}$ (Fig. S2). In the fitting procedure the value of the anodic electron transfer coefficient was varied from 0.45 to 0.55, in agreement with literature data, which report the values of 0.53, 0.54 and 0.55 for KCl, NaCl and LiCl supporting electrolytes at boron-doped diamond electrode [34], and the values within the interval from 0.46 to 0.55 at Pt electrode [35]. In our study the best fit was obtained for $\alpha = 0.55$ and the correlation between the experimental and simulated data is linear, with regression coefficient $R^2 = 0.942$, slope equal to 1, and intercept of 0.005. The estimated value of the standard rate constant is consisted with data obtained in our previous study, where values within the interval $(1.6 - 3.1) \times 10^{-3} \text{ cm s}^{-1}$ were found [24]. Referring to the common diffusion coefficient used in the simulations one should note that rigorously speaking the diffusion coefficients of the oxidised and reduced form of hexacyanoferrate are not equal (e.g., $D_{\text{Ox}} = 7.26 \times 10^{-6} \text{ cm}^2 \text{ s}^{-1}$ and $D_{\text{Red}} = 6.67 \times 10^{-6} \text{ cm}^2 \text{ s}^{-1}$ [36]). However, simulations have confirmed that these differences do not affect the accuracy of the estimation of the standard rate constant with amplitude-based quasireversible maximum when the electrode kinetics is within the upper part of the quasireversible region.

Importantly, Fig. 5A compares amplitude-based quasireversible maxima measured with conventional SWV and MA-SWCA for the frequency of $f = 25 \text{ Hz}$, revealing that the position of the maximum is virtually identical in both techniques, which is in accordance with the theoretical prediction presented in Fig. 2D. Note that the experiment with MA-SWCA was conducted with the mid-potential $E_m = E^{\circ'}([\text{Fe}(\text{CN})_6]^{3-/4-}) = 0.233 \text{ V}$. Fitting of the experimental and theoretical data under conditions of MA-SWCA the standard rate constant was estimated to be $k_s = 3.0 \times 10^{-3} \text{ cm s}^{-1}$, which is independent on the value of the electron transfer coefficient within the interval $0.45 \leq \alpha \leq 0.55$ (Fig. S3). Using the theoretical linear relationship between the critical amplitude $(E_{\text{sw}})_{\text{max}} / \text{V}$ and the dimensionless kinetic parameter κ : $\kappa = -1.8286(E_{\text{sw}})_{\text{max}} + 0.3687$; $R^2 = 0.9946$ (this equation is valid for $0.075 \leq \kappa \leq 0.325$), the standard rate constant was estimated to be $k_s = 3.38 \times 10^{-3} \text{ cm s}^{-1}$ (assuming $\alpha = 0.5$ and other

parameters identical as in Fig. S2). The system has been further studied by MA-SWCA for different frequencies and the data are summarized in Fig. 5B. Note that the chosen frequency values up to 100 Hz are not expected to cause an uncompensated resistance effect [25], implying that the accuracy of the measurement is not compromised. Increasing the frequency causes the amplitude-based quasireversible maximum to shift toward higher critical amplitudes, as the increasing frequency diminishes the electrode kinetic parameter, which support the theoretical data presented in Fig. 2C.

The second experimental system refers to the azobenzene/hydrazobenzene redox couple immobilized on the mercury electrode surface, which is typical diffusionless, surface confined electrode reaction [7]. Figure 6A shows well defined experimental amplitude-based quasireversible maxima at different pH values, measured over the amplitude interval from 10 to 200 mV for the frequency of 25 Hz. Increasing the pH shifts the amplitude-based quasireversible maximum toward higher critical amplitudes implying lowering of the standard rate constant, which is in agreement with literature data [27]. As the position of the amplitude-based quasireversible maximum under conditions of MA-SWCA does not depend on α for a surface electrode reaction for values in the range from 0.35 to 0.65, the fitting readily provides values for the surface standard rate constant of $k_{\text{sur}} = 15 \text{ s}^{-1}$, 12 s^{-1} , 6.6 s^{-1} and 2.7 s^{-1} for pH of 4, 5, 6 and 7, respectively.

To confirm theoretical predictions from Fig. 4B, where the position of the maximum depends on the electrode kinetic parameter, experimental amplitude-based quasireversible maxima have been measured at different frequencies in a buffer at pH = 7 (Fig. 6B). The measurements conducted at 25, 50 and 100 Hz are associated with critical amplitudes of $(E_{\text{sw}})_{\text{max}} = 80, 100$ and 150 mV , respectively. Increasing the frequency causes the electrode kinetic parameter $\omega = k_{\text{sur}}/f$ to decrease, thus shifting the maximum toward higher critical amplitudes, which is in agreement with the theoretical predictions. Using the regression equation for the relation between ω and $(E_{\text{sw}})_{\text{max}}$ derived from the simulations for $n = 2$ [37], $\log(\omega) = -3.104 \log(E_{\text{sw}}/V)_{\text{max}} - 4.418$ ($R^2 = 0.983$), the estimated values of the electrode kinetic parameter for the frequency of $f = 25, 50$ and 100 Hz are $\omega = 0.097, 0.048$ and 0.014 , respectively. Thus, the estimated standard rate constant at pH = 7 is $k_{\text{sur}} = 2.07 \text{ s}^{-1}$. The literature data for similar experimental conditions is $k_{\text{sur}} \approx 5 \text{ s}^{-1}$ [38]. Using the theoretical linear relationship between the real net current corresponding to the quasireversible

maximum $(I_{\text{net}})_{\text{max}} / A$ (i.e., the current at the critical amplitude $(E_{\text{sw}})_{\text{max}}$) and the total surface concentration: $\Gamma^* = 1.802(I_{\text{net}})_{\text{max}}$ (this equation is valid for $\omega = 0.097$, surface area of the electrode $A = 0.00102 \text{ cm}^2$, and other conditions identical as for Fig. 7), the total surface concentration at pH = 7 was estimated to be $\Gamma^* = 3.6 \times 10^{-6} \text{ mol/m}^2$.

For more accurate estimation of the standard rate constant the fitting of the experimental with theoretical data is recommended. The procedure is illustrated with the measurements at pH = 5, where a higher standard rate constant is expected compared to the medium at pH = 7. First, the electrode kinetics has been measured with the multi-frequency analysis, as described in our previous study [11]. Figure 7A shows a typical frequency spectrum over the frequency interval from 4 to 400 Hz (asterisks) together with the blank response (triangles). The fitting procedure (circles) reveals the standard rate constant of $k_{\text{sur}} = 18 \text{ s}^{-1}$ (the electron transfer coefficient is set to $\alpha = 0.5$). Conducting the experiment under conditions of MA-SWCA, together with the fitting procedure, leads to the standard rate constant of $k_{\text{sur}} = 12 \text{ s}^{-1}$ (Fig. 7B) confirming that MA-SWCA can reveal the kinetic data of the electrode reaction in a very fast and efficient procedure. These values are in close agreement with the data obtained by Laviron et al. [38], who found the value of 5.7 s^{-1} and 15 s^{-1} for cis and trans azobenzene isomer, respectively. In the present study an equimolar mixture of both isomers has been used; thus, the estimated value of 12 s^{-1} , is in an excellent agreement with the data of Laviron et al. [38].

Conclusions

Multi-amplitude square-wave chronoamperometry is a novel technique for accessing electrode kinetics by conducting a single experiment in which the height of the potential pulses progressively increases. The outcome of the experiment can be considered in both chronoamperometric and voltammetric contexts, revealing the versatility of the proposed approach. The technique provides a means to identify the amplitude-based quasireversible maximum, which is a common feature of a plethora of electrode mechanisms under conditions of SWV, which is sensitive to the electrode kinetics. Importantly, the maximum can be constructed by conducting a single experiment in MA-SWCA, replacing a series of

experiments needed in conventional SWV, thus reducing the error originating from the variation of the solid electrode surface by repeating the experiment. Another important feature is that the kinetic measurements are conducted at a constant frequency of the pulses, which is of particular importance when complex electrode mechanisms are studied, the response of which is dictated by a series of frequency-related kinetic parameters. For instance, assuming a quasireversible electrode mechanism coupled with a chemical reaction, variation of the frequency in multi-frequency analysis will simultaneously affect the kinetics of both electrode and chemical reactions, resulting in a complex behaviour. On the other hand, MA-SWCA has advantage over its analogous multi-frequency variant, as the variation of the amplitude at a constant frequency affects the electrode kinetics only. The proposed technique provides kinetic information of the electrode processes of both dissolved and immobilized redox couple. Yet, the precision of measurement of the amplitude-based quasireversible maximum for a kinetically controlled electrode reaction of a dissolved redox couple is higher for sluggish electrode reactions, which are associated with well-developed amplitude-based quasireversible maximum, the position of which can be precisely determined. For faster electrode reactions ($k_s > 10^{-2} \text{ cm s}^{-1}$), one should prefer multi-frequency variant over MA-SWCA, because the position of the maximum in multi-frequency experiment for rather fast electrode reactions is yet positioned at relatively low frequency values [11], thus avoiding the influence of uncompensated resistance and charging current. It should be noted that both techniques (MA-SWCA and MF-SWCA) have best performances when $E_m = 0 \text{ V vs } E^0$, which means that the formal potential should be previously known. Initial determination of the formal potential and examination of other basic experimental conditions (i.e., conditions of the electrode, electrolyte solution etc.) must be studied by well-established techniques such as cyclic voltammetry and/or SWV prior to the application of MA-SWCA and MF-SWCA.

It is reasonable to assume that SWCA [1] and its multi-frequency [11] and multi-amplitude variants will find their applications in electrochemical sensors, replacing the simple and frequently applied chronoamperometric protocol at a constant potential. While SWCA generally provides a basis for improved analytical performances, its multi-frequency and multi-amplitude variants enable estimation of kinetic parameters from a single experiment, which is of critical importance for a range of electrochemical sensors (e.g., affinity-based

electrochemical biosensors). Finally, it is plausible to envisage that the current methodology of SWCA will be further developing in a direction of simultaneous multi-frequency and multi-amplitude variations in a single experiment.

Author contributions

DG – Conceptualization, Data curation, Formal Analysis, Methodology, Project administration, Resources, Supervision, Validation, Writing – original draft, Writing – review & editing; LS - Formal Analysis, Investigation, Methodology, Resources, Software, Validation, Visualization, Writing – review & editing; ZZ – Investigation, Data curation; RGC – Writing – review & editing; VM – Conceptualization, Formal Analysis, Funding acquisition, Methodology, Software, Supervision, Writing – original draft, Writing – review & editing

Acknowledgements

VM and DG acknowledges with gratitude the support from the National Science Centre of Poland through the Opus Lap grant no 2020/39/I/ST4/01854.

References

1. D. Jadresko, D. Guziejewski, V. Mirceski, *ChemElectroChem* **2018**, 5, 187.
2. Mirceski, V.; Komorsky Lovrić, Š.; Lovrić, M. *Square-Wave Voltammetry: theory and application*; (Ed.: F. Scholz) Springer-Verlag, Berlin Heidelberg, **2007**.
3. W. M. Smit, M. D. Wijnen, *Recl. Trav. Chim. Pays-Bas* **1960**, 79, 5.
4. V. Mirceski, L. Stojanov, S. Skrzypek, *The Contributions, Sec. Nat. Math. Biotech. Sci.* **2018**, 39, 103.
5. C. Batchelor-McAuley, E. Kätelhön, E. Barnes, R. Compton, E. Laborda, A. Molina, *ChemistryOpen* **2015**, 4, 224.
6. V. Mirceski, D. Guziejewski, L. Stojanov, R. Gulaboski, *Anal. Chem.* **2019**, 91, 14904.
7. V. Mirceski, D. Guziejewski, M. Bozem, I. Bogeski, *Electrochim. Acta* **2016**, 213, 520.
8. V. Mirceski, L. Stojanov, R. Gulaboski, *J. Electroanal. Chem.* **2020**, 872, 114384.
9. L. Stojanov, V. Jovanovski, V. Mirceski, *Electroanalysis* **2021**, 33, 1271.
10. A. Molina, J. González, *Pulse Voltammetry in Physical Electrochemistry and Electroanalysis: theory and applications*; Springer, New York, **2016**.

11. L. Stojanov, D. Guziejewski, M. Puiu, C. Bala, V. Mirceski, *Electrochem. Commun.* **2021**, *124*, 106943.
12. M. Puiu, A. Idili, D. Moscone, F. Ricci, C. Bala, *Chem. Commun.* **2014**, *50*, 8962.
13. M. Puiu, C. Bala, *Curr. Opin. Electrochem.* **2018**, *12*, 13.
14. H. Adamson, A. M. Bond, A. Parkin, *Chem. Commun.* **2017**, *53*, 9519.
15. J. Li, C. L. Bentley, A. M. Bond, J. Zhang, *Anal. Chem.* **2016**, *88*, 2367.
16. A. M. Bond, T. L. E. Henderson, K. B. Oldham, *J. Electroanal. Chem.* **1985**, *191*, 75.
17. A. Neudeck, F. Marken, R. G. Compton, *Electroanalysis* **1999**, *11*, 1149.
18. X. Huang, L. Wang, S. Liao, *Anal. Chem.* **2008**, *15*, 5666.
19. A. Molina, J. González, E. Laborda, R. G. Compton, *J. Electroanal. Chem.* **2015**, *756*, 1.
20. Y. Uchida, E. Kätelhön, R. G. Compton, *J. Electroanal. Chem.* **2017**, *801*, 381.
21. S. J. M. Rosvall, M. Sharp, A. Bond, *J. Electroanal. Chem.* **2002**, *536*, 161.
22. P. Dauphin-Ducharme, N. Arroyo-Curras, M. Kurnik, G. Ortega, H. Li, K. Plaxco, *Langmuir* **2017**, *33*, 4407.
23. D. Guziejewski, *Electroanalysis* **2019**, *31*, 231.
24. V. Mirceski, D. Guziejewski, K. Lisichkov, *Electrochim. Acta* **2013**, *114*, 667.
25. V. Mirceski, M. Lovrić, *J. Electroanal. Chem.* **2001**, *497*, 114.
26. M. Noel, P. N. Anantharaman, *Analyst* **1985**, *110*, 1095.
27. S. Wawrzonek, J. D. Fredrickson, *J. Am. Chem. Soc.* **1955**, *77*, 3985.
28. R. S. Nicholson, M. L. Olmstead, M. L. in *Electrochemistry: Calculations, Simulation and Instrumentation* (Eds.: J. S. Mattson, H. B. Mark, H. C. MacDonald, Marcel Dekker, New York, **1972**, pp. 120–137.
29. V. Mirceski, E. Laborda, D. Guziejewski, R. G. Compton, *Anal. Chem.* **2013**, *85*, 5586.
30. S. Komorsky-Lovrić, M. Lovrić, *J. Electroanal. Chem.* **1995**, *384*, 115.
31. L. M. Peter, W. Durr, P. Bindra, H. Gerischer, *J. Electroanal. Chem.* **1976**, *71*, 31.
32. P. Bindra, H. Gerischer, L. M. Peter, *J. Electroanal. Chem.* **1974**, *57*, 435.
33. B. A. Brookes, R. G. Compton, *J. Phys. Chem. B* **1999**, *103*, 9020.
34. D. Y. Kim, J. Wang, J. Yang, H. W. Kim, G. M. Swain, *J. Phys. Chem. C* **2011**, *115*, 10026.
35. P. H. Daum, C. G. Enke, *Anal. Chem.* **1969**, *41*, 653.
36. S. J. Konopka, B. McDuffie, *Anal. Chem.* **1970**, *42*, 1741.
37. J. L. Sadler, A. J. Bard, *J. Am. Chem. Soc.* **1968**, *90*, 1979.
38. E. Laviron, Y. Mugnier, *J. Electroanal. Chem.* **1980**, *111*, 337.

Figure Captions

Fig. 1. **(A)** Potential modulation of conventional square-wave chronoamperometry (SWCA) showing the underlying constant mid-potential (E_m) (red line), the duration of a single potential pulse (t_p) and a potential cycle (τ), the height of the pulses (i.e. SW amplitude E_{sw}), and the measuring points of the forward (I_f) and backward (reverse) (I_r) current components. **(B)** Typical chronoamperometric response of SWCA showing forward, reverse and differential (net) current components. **(C)** Typical frequency spectrum of a quasireversible electrode reaction of a dissolved redox couple (circles), surface confined electrode reaction (squares), and EC' catalytic mechanism of a dissolved reversible redox couple (triangles). Each point corresponds to the net current of 50th potential cycle of the SWCA experiment simulated for different frequencies (the upper x-axis displays the duration of a single pulse corresponding to the frequency given at the lower x-axis). **(D)** Multi-amplitude variant of the square-wave chronoamperometry (MA-SWCA) in which the height of the pulses gradually increases in each potential cycle.

Fig. 2. Quasireversible electrode reaction of a dissolved redox couple. **(A)** Typical chronoamperometric response in the course of the MA-SWCA experiment showing the dimensionless current as a function of the serial number m of time increments for the electrode kinetic parameter $\kappa = 0.1$. The amplitude increases from 11 to 305 mV with an increment of 6 mV. The other conditions are: $\alpha = 0.5$, $n = 1$, $T = 298.15$ K, and $E_m = 0$ V vs E^0 . **(B)** Dimensionless current of the net (Ψ_{net}), forward (Ψ_f) and backward (Ψ_b) components as a function of the serial number (p) of potential cycles. **(C)** The dependency of the amplitude normalized net peak (Ψ_{net}/E_{sw}) on the logarithm of the SW amplitude (amplitude-based quasireversible maximum) for different values of the electrode kinetic parameter: $\log(\kappa) = -1.2$ (**1**); -1.0 (**2**) and -0.8 (**3**). **(D)** Amplitude-based quasireversible maximum under conditions of SWCA (circles), MA-SWCA (asterisks), and conventional SWV (triangles) for a sluggish electrode reaction with $\log(\kappa) = -1.2$. The SW chronoamperometric program contains 50 and 100 potential cycles for SWCA and MA-SWCA, respectively. In SWCA each net current corresponds to the last, 50th potential cycle for a given amplitude. The other conditions for panels **(B-D)** are identical as for **(A)**.

Fig. 3. Quasireversible electrode reaction of a dissolved redox couple. **(A)** The effect of the anodic electron transfer coefficient (α) on the position of the amplitude-based quasireversible maximum for $\log(\kappa) = -1$. The values are: $\alpha = 0.35$ (**1**); 0.5 (**2**) and 0.65 (**3**). **(B)** The dependence of the logarithm of the forward current component as a function of the amplitude for electrode kinetic parameter $\kappa = 0.1$ and electron transfer coefficient $\alpha = 0.3$ (**1**); 0.5 (**2**) and 0.7 (**3**).

Fig. 4. Surface confined electrode reaction. Amplitude-based quasireversible maximum under conditions of **(A)** conventional SWCA and **(B)** MA-SWCA for different values of the electrode kinetic parameter. The inset of **(B)** shows the relationship of the critical amplitude associated with the maximum and the electrode kinetic parameter, in a logarithmic form. For both panels the electrode kinetic parameter is: $\log(\omega) = -0.8$ (**1**); -0.4 (**2**); 0 (**3**); 0.4 (**4**) and 0.8 (**5**). The other conditions are: electron transfer coefficient $\alpha = 0.5$, $n = 1$, $T = 298.15$ K, and $E_m = 0$ V vs E^0 . The SW chronoamperometric program contains 50 and 100 potential cycles for panel **(A)** and **(B)**, respectively.

Fig. 5. Hexacyanoferrate redox system in 0.1 mol/L KNO_3 supporting electrolyte at glassy carbon electrode. **(A)** The amplitude-based quasireversible maximum at SW frequency of $f = 25$ Hz under conditions of conventional SWV (asterisks; left ordinate) and MA-SWCA (circles; right ordinate). **(B)** The effect of the frequency on the position of the amplitude-based quasireversible maximum under conditions of MA-SWCA for $f = 25$ (**1**); 50 (**2**) and 100 Hz (**3**). Dashed lines show the polynomial trendlines obtained from experimental results. The other experimental conditions are: bulk concentration of both $[\text{Fe}(\text{CN})_6]^{4-}$ and $[\text{Fe}(\text{CN})_6]^{3-}$ is $c = 0.25$ mmol/L, the mid-potential for MA-SWCA is $E_m = E^0 = 0.233$ V, estimated from the net peak-potential of conventional SWV. The step potential increment in SWV is $\Delta E = 5$ mV.

Fig. 6. Azobenzene electrode reaction at HMDE in BR buffers. The amplitude-based quasireversible maximum at SW frequency of $f = 25$ Hz in buffers at pH = 4 (**1**), 6 (**2**) and 7 (**3**). **(B)** The effect of the frequency on the position of the amplitude-based quasireversible maximum at pH = 7 for $f = 25$ (**1**); 50 (**2**) and 100 Hz (**3**). The other experimental conditions

are: bulk concentration of azobenzene $c = 2 \times 10^{-6}$ mol/L, accumulation time is 60 s at potential of 0.00 V applied prior to the application of MA-SWCA. The amplitude is gradually increasing from 10 to 200 mV. The mid-potential is $E_m = E^0$ (azobenzene), estimated from the net peak-potential of conventional SWV.

Fig. 7. Azobenzene electrode reaction at HMDE in a BR buffer at pH = 5. Fitting of the experimental and theoretical data. **(A)** Multi-frequency analysis: Frequency-based quasireversible maximum of experimental (asterisks, left ordinate) and theoretical data (circles, right ordinate), simulated for standard rate constant $k_s = 18 \text{ s}^{-1}$ and amplitude of $E_{sw} = 25 \text{ mV}$. **(B)** Multi-amplitude analysis: Amplitude-based quasireversible maximum of experimental (asterisks, left ordinate) and theoretical data (circles, right ordinate), simulated for standard rate constant $k_s = 12 \text{ s}^{-1}$ and frequency of $f = 25 \text{ Hz}$. The triangles in both panels refer to the blank experimental response. The other conditions of simulations for both panels are: electron transfer coefficient $\alpha = 0.5$, number of electrons $n = 2$, temperature $T = 298.15 \text{ K}$, and number of potential cycles is 100. The other experimental conditions are identical as for Fig. 4.

Supporting Information

Electrode kinetics from a single experiment: Multi-amplitude analysis in square-wave chronoamperometry

**Dariusz Guziejewski^{a*}, Leon Stojanov^b, Zuzanna Zwierzak^a, Richard G. Compton^c,
Valentin Mirceski^{a,b,d*}**

^a *Department of Inorganic and Analytical Chemistry, University of Lodz, Tamka 12, 91-403 Lodz,
Poland*

^b *Institute of Chemistry, Faculty of Natural Sciences and Mathematics, "Ss Cyril and Methodius"
University in Skopje, P.O. Box 162, 1000 Skopje, Republic of North Macedonia*

^c *Department of Chemistry, Physical and Theoretical Chemistry Laboratory, Oxford University,
South Parks Road, Oxford OX1 3QZ, Great Britain*

^d *Macedonian Academy of Sciences and Arts, Bul. Krste Misirkov 2, 1000 Skopje, Republic of
North Macedonia*

E-mail: dguziejewski@uni.lodz.pl, valentin@pmf.ukim.mk;

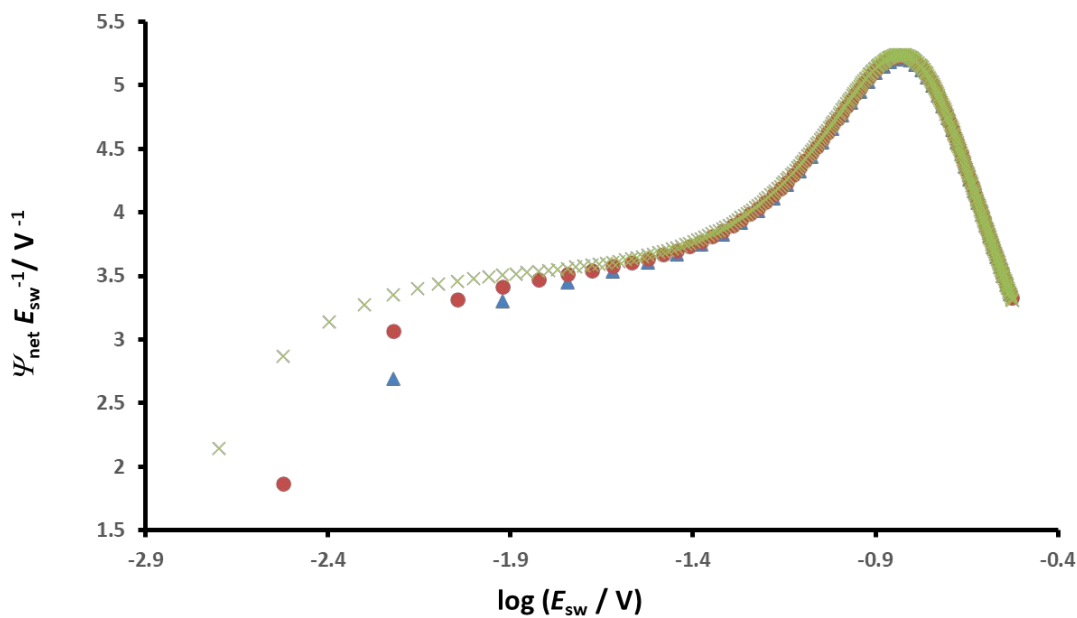


Fig. S1. Theoretical simulations in MA-SWCA for a quasireversible electrode reaction of a dissolved redox couple showing the effect of the amplitude increment in the amplitude-based quasireversible maximum. The values for the amplitude increment are: $\Delta E_{\text{sw}} = 1 \text{ mV}$ (asterisks), 3 mV (circles) and 6 mV (triangles). The other conditions are identical as for Fig. 2 (A).

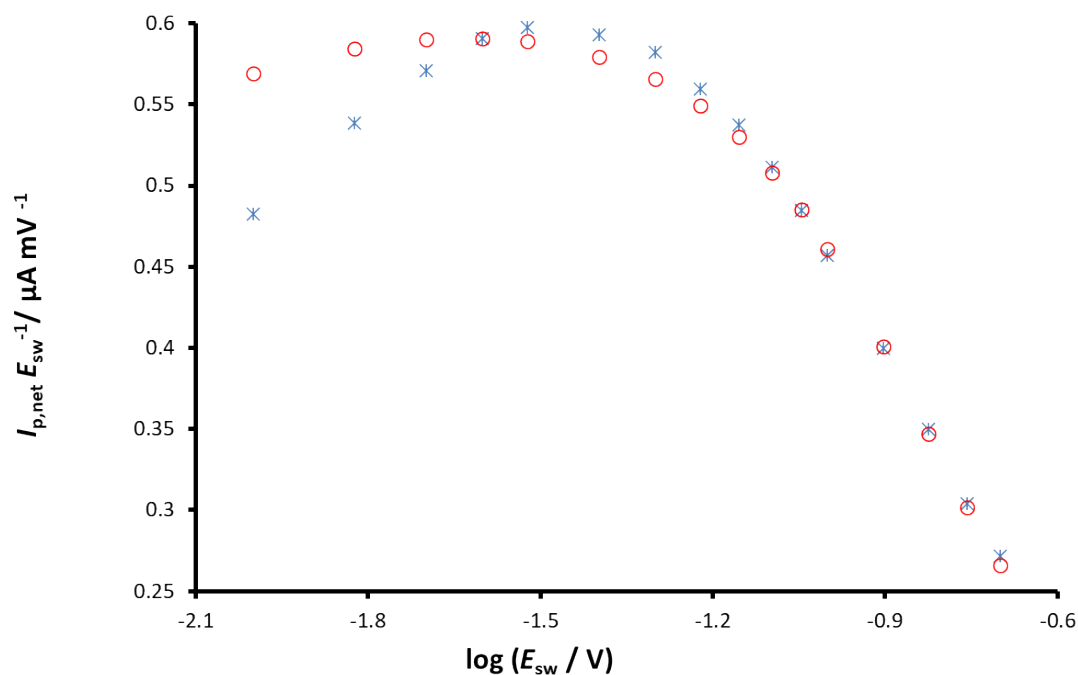


Fig. S2. Fitting of the theoretical and experimental data of the amplitude-based quasireversible maximum in SWV for a hexacyanoferrate redox system in 0.1 mol/L KNO_3 supporting electrolyte at a glassy carbon electrode. Experimental (asterisks) and theoretical data (circles), simulated for the standard rate constant $k_s = 5.0 \times 10^{-3} \text{ cm s}^{-1}$; diffusion coefficient $D = 5 \times 10^{-6} \text{ cm}^2 \text{ s}^{-1}$; anodic electron transfer coefficient $\alpha = 0.55$; amperometric constant $A = 54 \text{ } \mu\text{A}$ ($A = I / \Psi$), and temperature $T = 291.15 \text{ K}$. The other conditions for both theory and experiment are: frequency $f = 25 \text{ Hz}$; bulk concentration of both $[Fe(CN)_6]^{4-}$ and $[Fe(CN)_6]^{3-}$ is $c = 0.25 \text{ mmol/L}$ and the step potential increment $\Delta E = 5 \text{ mV}$.

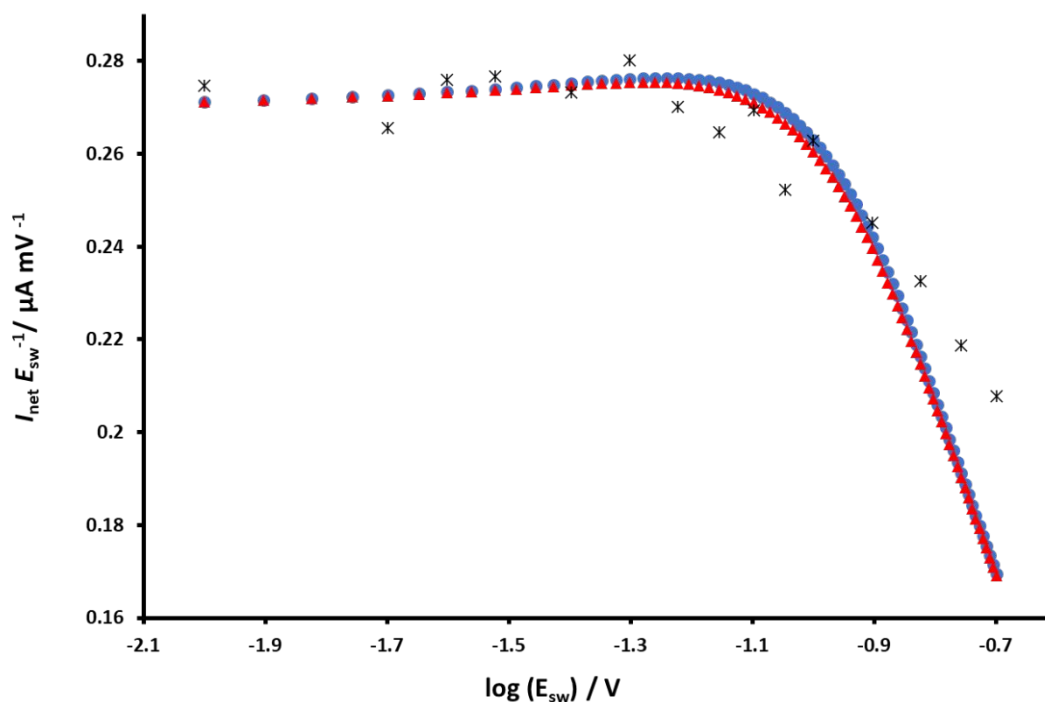


Fig. S3. Fitting of the theoretical (circles and triangles) and experimental data (asterisks) of the amplitude-based quasireversible maximum in MA-SWCA for a hexacyanoferrate redox system in 0.1 mol/L KNO_3 supporting electrolyte at a glassy carbon electrode. Theoretical data are simulated for different anodic electron transfer coefficients $\alpha = 0.45$ (red triangles) and $\alpha = 0.50$ (blue circles), with the standard rate constant $k_s = 3.0 \times 10^{-3} \text{ cm s}^{-1}$, and amperometric constant $A = 3.4 \times 10^{-5} \text{ A}$ (the values for $\alpha = 0.55$ are virtually identical as for $\alpha = 0.45$). The other conditions for both theory and experiment are identical as in Fig. S2.

REVIEWER REPORT(S):

Referee: 1

Comments to the Author

The paper introduces a new voltammetric/conoamperometric excitation signal and provides the theoretical basis for the interpretation of the data. This has been achieved by simulation of quasireversible diffusing and surface-confined redox couples under simplified conditions. The results have been tested with hexacyanoferrate and azobenzene as well-known redox couples for the two limiting situations.

The paper seems technically sound and novel. It also provides a nice introduction to previous attempts to increase the information content of voltammetric experiments.

(1) However, for a general physical chemistry audience it remains a bit obscure, why the new techniques are needed compared to cyclic voltammetry and electrochemical impedance spectroscopy, which (in principle) are able to determine all those parameters as well. The point of avoiding a voltammetric experiment at different scan rate and perhaps switching potentials is intuitive. However, the examples chosen would probably also be treated quite well by EIS.

Authors reply: We do agree with these general considerations of the referee. Besides well-established techniques and methods, we believe that development of new methods is still important, for more efficient, simple, and fast characterization of electrode reactions. One of the important advantages of the current method is that it enables a multiparameter analysis in a single experiment, which is important in the context of modern electrochemistry at solid electrodes, as noted at the bottom of P4 and the beginning of P5 (highlighted text) as follows: *“Such multiparameter analysis in a single experiment is of general importance in the context of electrochemical sensor application and solid electrode electrochemistry in general, where the electrode surface is a subject of constant variation in the process of cleaning and renewing the electrode surface, thus rigorously speaking, repeating the experiment under identical conditions is a priori impossible.”*

(2) Beyond this general consideration, there is of course the consideration of possible artefacts that may compromise the accuracy of the measurements, e.g., effect of IR drop. Though the paper carefully notes the simplification made and the departures of the real system, e.g., D_{red}

= D_{ox} , it says little about the effect of such common assumptions compared to more conventional techniques.

Authors reply: We do agree with the referee, thus a short comment is added in the Introduction part, including the new ref. [25] on the ohmic drop effect in SWV (P4, second paragraph, highlighted sentence). As discussed in our previous work [25], and taking into account similarities in the theory of SWV and the current novel multi-amplitude square-wave chronoamperometry (MA-SWCA), the effect of IR drop should be insignificant in both techniques when a constant, low frequency (< 100 Hz) is used.

(3) Given those limitations the last part of the conclusion seems a bit far-fetched compared to the results demonstrated in the paper. I have seen in my career many claims for the advances of very complicated excitation functions combined with dedicated data evaluation approaches, which seems completely plausible from a general point of view. However, I have rarely seen those techniques been applied outside of the inventors' laboratory or spread to a wide community without an obvious reason being clear. Besides the usual suspects (commercial availability of instrumentation, human inertia), there seems more reason behind this. I would think of robustness and „error self-indication“ even for less experienced users. Here, I am not so very sure with the new routines. For instance, how does a user perceives that the electrode is sufficiently clean for an analysis in the first place?

In this context: P10 „are reliable“, Compare susceptibility to artefact in CV or SQWV

I would encourage the authors to provide more thoughts or evidence on those points rather than to speculate about not-yet existing sensors and so on.

Authors reply: We do agree that we need to approach carefully and critically to the new techniques and their application. Thus, in Conclusion a new comment is added (highlighted text on P15, first paragraph) that cyclic voltammetry (CV) and/or SWV experiment must be done prior to the use of both techniques MA-SWCA and MF-SWCA at least to determine the formal redox potential of the studied redox couple and to examine other basic aspects of the experiment (i.e., condition of the electrode, electrolyte etc.).

(4) Secondly, I would advise to slightly rearrange the part on the experimental examples in a way, that is it is presented as an example that can be followed by others with similar redox couples. For this, I would prefer the statement and solution of clear intermediate objectives,

such as Determination of α , Determination of the standard rate constant of a diffusing redox couple, Determination of the total surface concentration, Determination of the standard rate constant of a surface-confined redox couple, ... I feel it would be good to provide the equations how these quantities can be obtained from a plot. Currently the paper dwells on how those parameters affect a certain way of plotting the simulated data. This is important for the foundation of the technique, but for applications, the reverse way will be used much more often.

Authors reply: We do agree with the referee's suggestion to provide semiempirical equations, derived from the theoretical analysis, in order to facilitate the application of the technique for other experimental systems. For the electrode reaction of a dissolved redox couple (eq. 1 on P5) we have added equations for determination of the electron transfer coefficient (highlighted text on P9) and the electrode kinetic parameter (P12, last paragraph). For the case of the surface confined electrode reaction, we note that the equation relating the critical amplitude $(E_{sw})_{max}$ and the electrode kinetic parameter ω was already given on P13, last paragraph. In addition, we have derived an equation relating the real net current corresponding to the position of the quasireversible maximum and the total surface concentration Γ^* (highlighted text on the bottom of P13 and beginning of P14). Using these equations, we have calculated the standard rate constant for the hexacyanoferrate redox system (P12, last paragraph) and the total surface concentration of azobenzene (P14, beginning).

(5) The demarcation between figure caption and main text is not very clear. (use blank line or set figure caption in different fonts).

Authors reply: It is corrected.

(6) Simulation details (Software, hardware requirements) are missing.

Authors reply: It is corrected (see the highlighted text on P6).

(7) Typos

P7 (3 mol/L [] KCl)

P13 This is [a] particularly important finding

Authors reply: All typos are corrected.

Referee: 2

Comments to the Author

In this manuscript, Guzierjewski et al. demonstrate the method & analysis of multi-amplitude square-wave chronoamperometry. The work is an extension of a previous report from the same authors (Electrochem.. Comm. 2021, 124,106943). Although this is a "new" approach for extracting electrode kinetics parameters (e.g, heterogeneous rate constant, transfer coefficient) from a single experiment, the authors do not truly demonstrate how this is more/less accurate than their previous multi-frequency analysis of square-wave chronoamperometry. Yes, they report values that are comparable/within the same order of magnitude, but if I was a doctoral student trying to choose one method versus the other to do determine the electrode kinetics of a new redox couple, I would not know which one is better to use. I think the authors should invest a bit more time to compare and contrast the methods and provide some guidelines as to when one approach is preferred versus the other.

Authors reply: We do agree that the two types of square-wave chronoamperometry should be critically compared. Thus, the Conclusions section is extended noting that MA-SWCA has advantages over MF-SWCA when complex mechanisms and sluggish electrode reactions are studied. On the other hand, for faster electrode kinetics and simpler electrode mechanisms one should prefer MF-SWCA over MA-SWCA (P15, two highlighted texts).

Additional minor comments:

- on page 4, Figure 1C, the authors may want to add an additional x-axis (top) that specifies the t_p . It makes it easier for the non-expert to correlate it to the frequency axis below.

Authors reply: It is corrected as suggested; we also added corresponding explanation in the figure caption (see the highlighted text on P18).

- there are many instances in the manuscript in which the authors state something that validates the method and is immediately followed by "(data not shown)" -- this is irritating. If it was a plot that was necessary to ensure that the approach is correct/self-consistent, then why not include it in the submission. It does not have to be in the main manuscript, but perhaps it can be included in the SI.

Authors reply: We do agree that data should be shown in Supporting Information (SI) section. Thus, all previous “data not shown” (highlighted in P9 and P12) were included in the SI as Fig S1, Fig S2 and Fig S3 with corresponding figure captions.

- on page 11, towards the end, the authors state that the obtained Tafel slopes deviated from classical Tafel analysis. It is unclear why this is the case. The authors mention the difference of the method (potential pulses vs. linear potential scan) - so is this related to (not) reaching steady state at the end of a pulse? Also, why not actually show the values of the slopes obtained vs. whatever is predicted from the classical Tafel analysis.

Authors reply: We do agree with the referee that the main reason why the Tafel slope values in MA-SWCA deviate from the classical Tafel analysis is related to the fact that steady state conditions are not fulfilled at the end of potential pulses. Thus, the text is modified and the exact slope values in MA-SWCA and in classical Tafel analysis are added (the highlighted text on the bottom of P9).

- On Fig 5 B. it is unclear if the dashed lines for dataset (1), (2) and (3) are mathematical fits, or just guides to the eye. Irrespective of, it should be specified in the caption. Along these lines, if it is a fit, can the authors share which parameter they used to test the "goodness-of-fit"? Moreover, in this particular plot, the effect of increasing the frequency on the amplitude-based maximum is studied. Consistent with the author's theoretical predictions, increasing the frequency decreases the electrode kinetic parameter, but the authors should comment/discuss how this affects the accuracy/precision of the extracted/calculated electrode kinetic parameters (e.g., k_s and α).

Authors reply: In Fig 5B all data are experimental. It means that dashed lines are not mathematical fits, rather than they are polynomial trendlines obtained from experimental results. We added this explanation in the corresponding figure caption (see the highlighted text on Fig 5 caption). Moreover, the frequency chosen in the figure are not very high (< 100 Hz), which according to the theoretical expectations [25], should not affect the accuracy/precision of the measurement. We added corresponding comment in the text together with a new reference [25] (P4).

Comparing the experimental data in Fig. 5B with corresponding theoretical data in Fig. 2C, it is obvious that the increasing of the frequency decreases the electrode kinetic parameter, and

consequently shifts the quasireversible maximum to higher amplitude values. However, rigorously speaking, the morphology of the experimental curves deviates slightly from the theoretical expectations. One of the plausible reasons is that the proposed new MA-SWCA is not ready-to-use technique in the available instrumentation, rather than it is emulated with a series of subsequent double-step chronoamperometric experiments. Thus, the outcome from the present emulated MA-SWCA experiment is not processed (purified) in the same way as commonly done in other pulse voltammetric techniques that are already implemented in the instrumentation (i.e., multiple measuring of the current in last end portion of the pulse, summing, averaging etc.).

Electrode kinetics from a single experiment: Multi-amplitude analysis in square-wave chronoamperometry

Dariusz Guziejewski^{a*}, Leon Stojanov^b, Zuzanna Zwierzak^a, Richard G. Compton^c, Valentin Mirceski^{a,b,d*}

^a Department of Inorganic and Analytical Chemistry, University of Lodz, Tamka 12, 91-403 Lodz, Poland

^b Institute of Chemistry, Faculty of Natural Sciences and Mathematics, "Ss Cyril and Methodius" University in Skopje, P.O. Box 162, 1000 Skopje, Republic of North Macedonia

^c Department of Chemistry, Physical and Theoretical Chemistry Laboratory, Oxford University, South Parks Road, Oxford OX1 3QZ, Great Britain

^d Macedonian Academy of Sciences and Arts, Bul. Krste Misirkov 2, 1000 Skopje, Republic of North Macedonia

E-mail: dguziejewski@uni.lodz.pl, valentin@pmf.ukim.mk;

Abstract

The recently introduced technique of square-wave chronoamperometry (SWCA), is studied under conditions of progressively increasing height of potential pulses (square-wave amplitude) within a single experiment. In multi-amplitude square-wave chronoamperometry (MA-SWCA) a potential modulation consisting of square-wave forward and reverse potential pulses is imposed on a constant mid-potential; the amplitude of pulses increases progressively during the experiment. This allows the fast and reliable estimation of kinetic parameters at a constant pulse frequency in a single experiment, based on the resulting feature known as the amplitude-based quasireversible maximum. The proposed methodology is tested by simulating the responses of a simple quasireversible electrode reaction of a dissolved redox couple and a surface confined electrode reaction. Compared with conventional square-wave voltammetry (SWV) and SWCA, MA-SWCA shows advantages in estimation of the standard rate constant in terms of simplicity, speed and efficiency for both studied electrode mechanisms.

Keywords: Electrochemical Faradaic spectroscopy; Electrode kinetics; Electron transfer; Multi-amplitude analysis; Square-wave voltammetry; Voltammetry

1. Introduction

Square-wave chronoamperometry (SWCA) [1] is a simplified form of square-wave voltammetry (SWV) [2]. The potential modulation (Fig. 1A) is a train of potential pulses of a height $2E_{\text{sw}}$ (where E_{sw} is the SW amplitude) imposed over a constant mid-potential (E_m), whereas the current is measured at the end of each potential pulse, resulting in forward, backward (reverse) and differential (net) chronoamperometric current components (Fig. 1B). The technique, which finds its similarity with early works of Smit and Wijnen [3], is derived from SWV by replacing the underlying staircase potential of SWV with a constant mid-potential. In a quest for methodological advancing of voltammetric techniques [4, 5] in analytical, mechanistic and electrode kinetics contexts, SWCA has been introduced for the purpose of simplification of SWV and belongs to the group of recently introduced novel techniques derived from SWV [6-8].

While SWCA cannot be realistically applied for the initial mechanistic study of an unknown electrode reaction, it provides advantages for analytical application [9]. Specifically, the net chronoamperometric current component gains a shape typical for a steady-state electrode process, regardless of the electrode dimensions (micro or macroscopic electrode) and the type of electrode reaction (surface confined or diffusion affected, Fig. 1B). Aiming to study electrode kinetics the main tool in hand is the duration of potential pulses (t_p), or in terms of SWV, the SW frequency (f) defined as $f = 1/\tau = 1/(2t_p)$, where $\tau = 2t_p$ is the duration of a single potential cycle composed of two adjacent pulses (cf. Fig. 1A). The electrode reaction is commonly studied by varying the SW frequency; thus, the technique can be understood as an electrochemical Faradaic spectroscopy, keeping in mind that the current measured at the end of each potential pulse extracts mainly the Faradaic component of the response as common in the pulse voltammetry [10]. The corresponding frequency spectrum of the current components is highly sensitive to the electrode kinetics and the type of the electrode mechanism, as exemplified in Fig. 1C, where the net current is presented as a function of the frequency, for three different electrode mechanisms.

Beyond the basic form of the technique (Fig. 1A) it is easy to envisage a variant in which the duration of the potential pulses can progressively decreases (i.e., the SW frequency increases) in the course of a single SWCA experiment. Accordingly, a multi-frequency analysis

has been proposed in our recent study [11], which enables inspection of the electrode reaction at different frequencies in a course of a single experiment, thus revealing the electrode kinetic parameters in a fast and efficient procedure. Such an approach, besides being useful in studying electrode kinetics in general, is expected to be beneficial for application with electrochemical sensors as well; for instance, affinity-based biosensors with “signalling-off” interrogation operate due to the variation of the electrode kinetics as a result of the analyte attachment to a redox-labelled, surface-immobilized probe [12, 13]. Here it is worth mentioning that other sophisticated methods for complete electrode characterization in a single experiment can be found in the works of merit of Bond et al. on the Fourier transformed ac voltammetry [14, 15] as well as in other studies [16-19]. Particularly appealing is the recent technique with non-triangular potential variation in cyclic voltammetry which enables conduction of a single experiment with a series of scan rates [20].

In the present study we expand further the idea of multi-frequency analysis [11], testing the application of SWCA under conditions of a multi-amplitude variation in a single experiment (Fig. 1D). It is worth mentioning that the amplitude is a powerful tool in conventional SWV, as demonstrated in a series of studies over the last decades [21-23]. Variation of the amplitude in SWV provides a means to measure the electrode kinetics at a constant scan rate of the voltammetric experiment, which is beneficial when complex electrode mechanisms are studied, the voltammetric response of which depends on several frequency-dependent parameters [24]. Moreover, the experiments at a constant SW frequency are also beneficial as the effect of frequency-related uncompensated resistance is significantly reduced [25]. Thus, a multi-amplitude variant of square-wave chronoamperometry (MA-SWCA) is proposed as shown in Fig. 1D, where the height of potential pulses progressively enhances during the experiment. Based on numerical simulations it will be demonstrated that the proposed technique provides an insight into the electrode kinetics of both quasireversible electrode reaction of a dissolved redox couple at a macroscopic planar electrode and the surface confined, diffusion free electrode reaction. The proposed approach replaces a series of repetitive experiments in SWV conducted at different amplitudes with a single experiment with MA-SWCA to provide an insight into the electrode kinetics. Such multiparameter analysis in a single experiment is of general importance in the context of electrochemical sensor application and solid electrode electrochemistry in general, where the electrode surface is a subject of constant variation in the process of cleaning and

renewing the electrode surface, thus rigorously speaking, repeating the experiment under identical conditions is *a priori* impossible.

The applicability of the proposed methodology has been partly tested by experiments conducted with the $[\text{Fe}(\text{CN})_6]^{4-}/[\text{Fe}(\text{CN})_6]^{3-}$ redox couple at a glassy carbon electrode (GCE) as a model for a quasireversible electrode reaction of a dissolved redox couple [26], and azobenzene/hydrazobenzene couple immobilized on the mercury electrode surface, as a model for quasireversible surface confined electrode reaction [27].

2. Details on electrode mechanisms and simulation procedure

A quasireversible one-electron electrode reaction is considered (eq. 1). The redox couple consists of two chemically stable species dissolved in the electrolyte solution (sol) and the electrode reaction takes place at a macroscopic planar electrode.



For the sake of simplicity, the charge of the species in eq. (1) is omitted. The electrode kinetics is described with a Butler-Volmer kinetic model, attributed with the standard rate constant k_s (cm s^{-1}) and anodic electron transfer coefficient α . At the beginning of the experiment, only Red species are present in the solution at the bulk concentration of c_R^* . For the sake of simplicity, the diffusion coefficient (D) of both Red and Ox is assumed to be equal. All other details of the model are given in [2]. For numerical simulations eq. (2) was applied, which was derived following the step function method [28].

$$\psi_m = \frac{\kappa \exp(\alpha \phi_m) \left\{ 1 - \frac{2[1 + \exp(-\phi_m)]}{\sqrt{50\pi}} \sum_{j=1}^{m-1} \psi_j S_{m-j+1} \right\}}{1 + \frac{2\kappa \exp(\alpha \phi_m)}{\sqrt{50\pi}} [1 + \exp(-\phi_m)]} \quad (2).$$

Here, $\psi = \frac{I}{FAc_R^* \sqrt{Df}}$ is the dimensionless current, A is the electrode surface area, $\phi = \frac{F}{RT} (E - E^{\circ'})$ is the dimensionless electrode potential defined versus the formal potential of the electrode reaction ($E^{\circ'}$), $S_m = \sqrt{m} - \sqrt{m-1}$ is the numerical integration parameter, and m is the serial number of time increments. The time increment is defined as $d = \frac{1}{50f}$, which

means that each potential pulse is divided into 25 equal time increments. In addition, $\kappa = \frac{k_s}{\sqrt{Df}}$ is the electrode kinetic parameter, and other symbols have their common meaning.

A surface confined electrode reaction is described by the following equation:



where the abbreviation (ads) implies immobilization of the species on the electrode surface by adsorption, although the adsorption is not the only means of immobilization. The redox species are associated with their surface concentration Γ , which is a function of time. At the beginning of the experiment, only the Red form is present on the electrode surface, with a surface concentration $\Gamma_R = \Gamma^*$. No lateral interactions are assumed between immobilized species. Butler-Volmer kinetics is assumed with a surface standard rate constant k_{sur} in units of s^{-1} . The numerical solution reads [2]:

$$\psi_m = \frac{\omega \exp(\alpha \phi_m) \left(1 - \frac{1 + \exp(-\phi_m)}{50} \sum_{j=1}^{m-1} \psi_j \right)}{1 + \frac{\omega \exp(\alpha \phi_m)}{50} (1 + e^{-\phi_m})} \quad (4),$$

where the dimensionless current is $\psi = \frac{I}{nFA\Gamma^*f}$, $\omega = \frac{k_{\text{sur}}}{f}$ is the dimensionless electrode kinetic parameter, $\phi = \frac{nF}{RT}(E - E^{\circ'})$ is dimensionless potential, and n is the stoichiometric number of electrons in eq. (3).

All simulations under conditions of MA-SWCA are conducted at the mid-potential equal to the formal potential $E_m = E^{\circ'}(\text{Ox/Red})$ by gradually increasing the amplitude, commonly from 10 to 300 mV. All simulations are performed by the commercial computer package MATHCAD 14 with a minimum hardware requirements of a Pentium 32-bit (x86) processor - 400 MHz and 256 MB of RAM.

3. Experimental

A multi-Autolab potentiostat model M101 controlled by the Nova software (v. 2.1.4, both Metrohm Autolab B.V.) was used to conduct all experiments. A hanging mercury drop

electrode (HMDE; MTM Anko Instruments, Poland, surface area 0.00102 cm^2) was the working electrode for the experiments with azobenzene, whereas a glassy carbon electrode was used for the experiments with the hexacyanoferrate redox system. In both cases Ag/AgCl (3 mol/L KCl) was used as a reference electrode and a platinum wire was used as a counter electrode. All experiments were conducted at room temperature.

All chemicals were of analytical grade purity (Merck, Sigma-Aldrich or POCh), while solutions were prepared with deionized water obtained with Polwater DL-3 purification system. 1 mmol/L stock solution of azobenzene was prepared by dissolving in methanol. Britton-Robinson buffers at different pH values were used as supporting electrolytes for experiments with azobenzene. The stock solutions of $\text{K}_4[\text{Fe}(\text{CN})_6]$ and $\text{K}_3[\text{Fe}(\text{CN})_6]$ were prepared by dissolving in water, while 0.1 mol/L KNO_3 solution was used as a supporting electrolyte.

As the MA-SWCA technique is not provided by the instrumentation, experiments were conducted by designing a series of subsequent double-step chronoamperometric protocols in Nova software in which the amplitude of the pulses was progressively increased from 2 to 200 mV for each potential cycle of a given duration (i.e., given frequency of the MA-SWCA experiment). In the chronoamperometric experiment the current sampling was conducted in the course of the whole duration of each potential pulse; specifically, each potential pulse consisted of 30 measurement current points, where the last one was used to construct the outcome of the experiment. Rigorously speaking, this way of sampling the current is not identical as in other pulse techniques that are already provided by the instrumentation, so scattering of experimental data relative to the theoretical expectations are plausible. However, for the purpose of this study, designing a series of subsequent double-step chronoamperometric protocols emulating the potential variation in MA-SWCA is sufficient. Conventional SWV with corresponding parameters was also applied in parallel to the chronoamperometric measurements. In azobenzene experiments accumulation of the redox probe at 0.0 V, followed by a 10 s quiescent period, was performed prior applying potential modulation in MA-SWCA or conventional SWV.

4. Results and discussion

4.1 Theoretical data

A typical chronoamperometric response, showing the current variation over the whole duration of potential pulses of the MA-SWCA virtual experiment is shown in Fig. 2A, where the dimensionless current is plotted as a function of the serial number (m) of time increments (i.e., time of the experiment). The simulations correspond to a typical quasireversible electrode reaction characterized with the electrode kinetic parameter $\kappa = 0.1$ and the anodic electron transfer coefficient $\alpha = 0.5$. Note that from the theory of SWV [2] the electrode kinetic parameter is defined as $\kappa = k_s / (Df)^{1/2}$, where k_s is the standard rate constant. The electrode kinetic parameter together with the SW amplitude are the main parameters controlling the apparent electrochemical reversibility of a given electrode reaction. The increase of the current in each subsequent potential cycle (cf. Fig. 2A) is proportional to the enlargement of the height of potential pulses, i.e., the driving force of the electrode reaction. Extracting the currents from the end of each potential pulse, the forward, reverse and net chronoamperometric components can be constructed, being presented versus the serial number (p) of potential cycles, as shown in Fig. 2B. Each current component has a sigmoid shape, where the increasing part of the curve reflects the effect of the electrode kinetics. Clearly, replacing the serial number of potential cycles with the corresponding amplitude value, one can consider the outcome of the experiment in a voltammetric context, while the shape of the curves remains the same as in Fig. 2B. Thus, the upper plateau of the forward and net components (and the lower plateau of the reverse component) corresponds to the large amplitude values, when the electrode reaction is dominantly controlled by the diffusion rate.

Following the methodology developed in our previous study [29], the most convenient way of presenting the data is in the form of amplitude normalized net current ($\Psi_{\text{net}}/E_{\text{sw}}$) as a function of the logarithm of the amplitude (Fig. 2C). The corresponding function has an approximately parabola-like shape, the maximum of which is sensitive to the electrode kinetics, as can be inferred from Fig. 2C. As the maximum is associated with the quasireversible kinetic region, the latter function is conveniently termed the *amplitude-based quasireversible maximum* [29]. Let us note that for a given frequency and diffusion coefficient, the variation of κ presented in Fig. 2C corresponds to the variation of the standard rate constant. The parameter $\Psi_{\text{net}}/E_{\text{sw}}$ can be understood as a primitive first derivation of the function Ψ_{net} vs. E_{sw} , reflecting the slope of the linear part of the function, which depends on

the standard rate constant [29]. Importantly, as shown in Fig. 2D, the amplitude-based quasireversible maximum can be obtained under conditions of both conventional SWCA and MA-SWCA. For the conventional SWCA the virtual experiment is repeated for each amplitude value, whereas in MA-SWCA the amplitude-based quasireversible maximum is measured by conduction of a single experiment. Including simulations with conventional SWV, Fig. 2D shows that the position of the maximum is identical for all three techniques, clearly revealing that kinetic measurements in a single experiment with MA-SWCA are reliable.

The outcome of the MA-SWCA experiment is predominantly controlled by the SW frequency and amplitude of the pulses regardless of the overall duration of the experiment, provided that $E_m = E^{\phi'}(\text{Ox/Red})$. For instance, increasing the amplitude over the interval from 13 to 300 mV with an increment of 6 mV, where the total number of potential cycles is $p = 50$, the position of the maximum is located at the critical amplitude of $(E_{\text{sw}})_{\text{max}} = 150$ mV (for $\kappa = 0.1$). Repeating the simulations by lowering the amplitude increment and thus increasing the total number of potential cycles to 100 and 500, the position of the maximum remains at the same critical amplitude of $(E_{\text{sw}})_{\text{max}} = 150$ mV, clearly implying that chronoamperometric characteristics of the system dictated by the overall duration of the experiment are insignificant (Fig. S1).

On the other hand, the position of the maximum is sensitive to the electron transfer coefficient (α), as shown in Fig. 3A. Thus, α has to be previously known in order to estimate the standard rate constant by means of the amplitude-based quasireversible maximum. A possible approach for estimation of α with the current technique is to consider the MA-SWCA experiment in a voltammetric context. Specifically, the forward current component (ψ_f) can be analysed as a function of the SW amplitude in a Tafel-like analysis, as presented in Fig. 3B. The function $\ln(\psi_f)$ vs. E_{sw} has a linear part, the slope of which is sensitive to the electron transfer coefficient (Fig. 3B). The relationship between the slope value (m / V^{-1}) and electron transfer coefficient α for amplitude values of $20 \text{ mV} \leq E_{\text{sw}} \leq 60 \text{ mV}$ is represented by the following linear function: $\alpha = 0.062m - 0.426$; $R^2 = 0.9817$ (this equation is valid for transfer coefficient of $0.3 \leq \alpha \leq 0.7$ and other parameters as in Fig. 3). In Fig. 3B the slope values for $\alpha = 0.30$ (1); 0.5 (2) and 0.70 (3) are 11.43; 15.15 and 17.76 V^{-1} , respectively. These values slightly deviate from the values (11.68; 19.46 and 27.25 V^{-1}) in the classical Tafel analysis (i.e.,

$\alpha F/(RT))$ as the experiment is conducted with short potential pulses that do not allow steady-state conditions in the system at the end of the potential pulses.

In addition, as implicit in the previous study [29], the electrode kinetics of surface confined electrode processes can be studied by variation of the SW amplitude in conventional SWV. A similar methodology can be applied in both conventional SWCA and MA-SWCA, as shown by the data summarized in Fig. 4. In conventional SWCA the experiment is repeated for different amplitudes, while the net current measured at the end of the experiment is plotted versus the logarithm of the amplitude (Fig. 4A). As known from the theory of SWV for surface confined processes, transposition of the electrode reaction through the quasireversible kinetic region is associated with a parabolic variation of the net peak-current, known as the quasi-reversible maximum [30]. As previously mentioned, the apparent electrochemical reversibility of a given electrode reaction can be altered either by changing the SW frequency or by the amplitude. Thus, in SWCA conducted at a given frequency, the electrochemical reversibility is affected by the variation of the amplitude, giving rise to a well-defined, sharp, amplitude-based quasireversible maximum (Fig. 4A).

In MA-SWCA the amplitude-based quasi-reversible maximum can be measured in a single experiment, as shown in Fig. 4B. The position of the maxima for different values of the electrode kinetic parameter is identical as in conventional SWCA, confirming that MA-SWCA provides consistent data. The position of the maximum is markedly sensitive to the electrode kinetic parameter $\omega = k_{\text{sur}}/f$, i.e., to the standard rate constant $k_{\text{sur}}(\text{s}^{-1})$. As can be inferred from the inset of Fig. 4B the relation between the electrode kinetic parameter and the critical amplitude $(E_{\text{sw}})_{\text{max}}$ is exponential, and it can be transformed into a linear function in a “log-log” form as follows: $\log(\omega) = -1.975 \log(E_{\text{sw}}/V)_{\text{max}} - 2.398$. The latter equation enables estimation of the electrode kinetic parameter $\omega = k_{\text{sur}}/f$ (and thus the standard rate constant k_{sur}) by measuring the critical amplitude by means of MA-SWCA experiment conducted for a given frequency.

Importantly, the amplitude-based quasireversible maximum of surface electrode processes under conditions of MA-SWCA does not depend on the number of potential cycles (i.e., overall duration of the experiment) and slightly depends on the electron transfer coefficient. More specifically, for $0.35 \leq \alpha \leq 0.65$, the maximum is located at $(E_{\text{sw}})_{\text{max}} = 98 \pm 2$ mV for $\log(\omega) = -0.4$. Beyond this interval the position of the maximum is affected slightly by

the electron transfer coefficient α , which is consistent with previous findings [29]. This is particularly important finding demonstrating that the position of the amplitude-based quasireversible maximum can be used for determination of the standard rate constant without previous knowledge of the electron transfer coefficient, considering that most frequently the electron transfer coefficient of surface electrode reactions is within the above given interval.

4.2 Experimental data

The one-electron electrode reaction of the redox couple $[\text{Fe}(\text{CN})_6]^{3-}/[\text{Fe}(\text{CN})_6]^{4-}$ serves as a representative for a quasireversible process of a dissolved species uncomplicated with either adsorption or coupled chemical reactions. The experiments have been conducted in the presence of both $[\text{Fe}(\text{CN})_6]^{3-}$ and $[\text{Fe}(\text{CN})_6]^{4-}$ redox species at equal concentration of 0.25 mmol/L. It should be however noted that the electrode reaction of hexacyanoferrate system is highly susceptible to the type of the electrode and the state of the electrode surface in particular when the carbon type electrode is used [26], as well as the concentration and composition of the supporting electrolyte, where the type of both cations [31] and anions [26] play a critical role in the electrode kinetics. In spite of the non-ideal behaviour of the hexacyanoferrate system, it is an attractive system for electrode characterization as it is readily available in pure form, stable in many solvents, providing reasonably well-defined electrochemical behaviour. Increasing the concentration of the supporting electrolyte (e.g., an aqueous electrolytes containing K^+ ions) the kinetics of the electrode reaction increases from quasireversible to typical reversible behaviour at macroelectrodes [32]. Most frequently, under experimental conditions of the current study (0.1 mol/L KNO_3 aqueous solution at a glassy carbon macroelectrode) the electrode reaction is electrochemically quasireversible [24].

First the features of the electrode reaction were briefly studied by conventional SWV. Over the frequency interval from 20 to 400 Hz, the SW net peak-current ($I_{p,\text{net}}$) is a linear function of the square root of the frequency, while the net peak potential is almost constant with an average value of 0.230 V, which is typical for the upper quasireversible region, close to the reversible voltammetric behaviour [2]. The function $I_{p,\text{net}}f^{-0.5}$ vs. $\log(f^{-0.5})$, which corresponds to the expected theoretical relation of the dimensionless net peak-current ($\Psi_{p,\text{net}}$) vs. $\log(\kappa)$ (κ is the electrode kinetic parameter), increases steadily,

confirming that the rate of the electrode reaction is within the quasireversible kinetic region [33]. Studying the electrode reaction by varying the SW amplitude in conventional SWV a well-developed amplitude-based quasireversible maximum was obtained, shown in Fig. 5A (asterisks). Fitting the experimental results with the theoretical one, the standard rate constant of $k_s = 5.0 \times 10^{-3} \text{ cm s}^{-1}$ was estimated, assuming a common diffusion coefficient of $D = 5 \times 10^{-6} \text{ cm}^2 \text{ s}^{-1}$ (Fig. S2). In the fitting procedure the value of the anodic electron transfer coefficient was varied from 0.45 to 0.55, in agreement with literature data, which report the values of 0.53, 0.54 and 0.55 for KCl, NaCl and LiCl supporting electrolytes at boron-doped diamond electrode [34], and the values within the interval from 0.46 to 0.55 at Pt electrode [35]. In our study the best fit was obtained for $\alpha = 0.55$ and the correlation between the experimental and simulated data is linear, with regression coefficient $R^2 = 0.942$, slope equal to 1, and intercept of 0.005. The estimated value of the standard rate constant is consisted with data obtained in our previous study, where values within the interval $(1.6 - 3.1) \times 10^{-3} \text{ cm s}^{-1}$ were found [24]. Referring to the common diffusion coefficient used in the simulations one should note that rigorously speaking the diffusion coefficients of the oxidised and reduced form of hexacyanoferrate are not equal (e.g., $D_{\text{Ox}} = 7.26 \times 10^{-6} \text{ cm}^2 \text{ s}^{-1}$ and $D_{\text{Red}} = 6.67 \times 10^{-6} \text{ cm}^2 \text{ s}^{-1}$ [36]). However, simulations have confirmed that these differences do not affect the accuracy of the estimation of the standard rate constant with amplitude-based quasireversible maximum when the electrode kinetics is within the upper part of the quasireversible region.

Importantly, Fig. 5A compares amplitude-based quasireversible maxima measured with conventional SWV and MA-SWCA for the frequency of $f = 25 \text{ Hz}$, revealing that the position of the maximum is virtually identical in both techniques, which is in accordance with the theoretical prediction presented in Fig. 2D. Note that the experiment with MA-SWCA was conducted with the mid-potential $E_m = E^{\circ'}([\text{Fe}(\text{CN})_6]^{3-/4-}) = 0.233 \text{ V}$. Fitting of the experimental and theoretical data under conditions of MA-SWCA the standard rate constant was estimated to be $k_s = 3.0 \times 10^{-3} \text{ cm s}^{-1}$, which is independent on the value of the electron transfer coefficient within the interval $0.45 \leq \alpha \leq 0.55$ (Fig. S3). Using the theoretical linear relationship between the critical amplitude $(E_{\text{sw}})_{\text{max}} / \text{V}$ and the dimensionless kinetic parameter κ : $\kappa = -1.8286(E_{\text{sw}})_{\text{max}} + 0.3687$; $R^2 = 0.9946$ (this equation is valid for $0.075 \leq \kappa \leq 0.325$), the standard rate constant was estimated to be $k_s = 3.38 \times 10^{-3} \text{ cm s}^{-1}$ (assuming $\alpha = 0.5$ and other

parameters identical as in Fig. S2). The system has been further studied by MA-SWCA for different frequencies and the data are summarized in Fig. 5B. Note that the chosen frequency values up to 100 Hz are not expected to cause an uncompensated resistance effect [25], implying that the accuracy of the measurement is not compromised. Increasing the frequency causes the amplitude-based quasireversible maximum to shift toward higher critical amplitudes, as the increasing frequency diminishes the electrode kinetic parameter, which support the theoretical data presented in Fig. 2C.

The second experimental system refers to the azobenzene/hydrazobenzene redox couple immobilized on the mercury electrode surface, which is typical diffusionless, surface confined electrode reaction [7]. Figure 6A shows well defined experimental amplitude-based quasireversible maxima at different pH values, measured over the amplitude interval from 10 to 200 mV for the frequency of 25 Hz. Increasing the pH shifts the amplitude-based quasireversible maximum toward higher critical amplitudes implying lowering of the standard rate constant, which is in agreement with literature data [27]. As the position of the amplitude-based quasireversible maximum under conditions of MA-SWCA does not depend on α for a surface electrode reaction for values in the range from 0.35 to 0.65, the fitting readily provides values for the surface standard rate constant of $k_{\text{sur}} = 15 \text{ s}^{-1}$, 12 s^{-1} , 6.6 s^{-1} and 2.7 s^{-1} for pH of 4, 5, 6 and 7, respectively.

To confirm theoretical predictions from Fig. 4B, where the position of the maximum depends on the electrode kinetic parameter, experimental amplitude-based quasireversible maxima have been measured at different frequencies in a buffer at pH = 7 (Fig. 6B). The measurements conducted at 25, 50 and 100 Hz are associated with critical amplitudes of $(E_{\text{sw}})_{\text{max}} = 80, 100$ and 150 mV , respectively. Increasing the frequency causes the electrode kinetic parameter $\omega = k_{\text{sur}}/f$ to decrease, thus shifting the maximum toward higher critical amplitudes, which is in agreement with the theoretical predictions. Using the regression equation for the relation between ω and $(E_{\text{sw}})_{\text{max}}$ derived from the simulations for $n = 2$ [37], $\log(\omega) = -3.104 \log(E_{\text{sw}}/V)_{\text{max}} - 4.418$ ($R^2 = 0.983$), the estimated values of the electrode kinetic parameter for the frequency of $f = 25, 50$ and 100 Hz are $\omega = 0.097, 0.048$ and 0.014 , respectively. Thus, the estimated standard rate constant at pH = 7 is $k_{\text{sur}} = 2.07 \text{ s}^{-1}$. The literature data for similar experimental conditions is $k_{\text{sur}} \approx 5 \text{ s}^{-1}$ [38]. Using the theoretical linear relationship between the real net current corresponding to the quasireversible

maximum $(I_{\text{net}})_{\text{max}} / A$ (i.e., the current at the critical amplitude $(E_{\text{sw}})_{\text{max}}$) and the total surface concentration: $\Gamma^* = 1.802(I_{\text{net}})_{\text{max}}$ (this equation is valid for $\omega = 0.097$, surface area of the electrode $A = 0.00102 \text{ cm}^2$, and other conditions identical as for Fig. 7), the total surface concentration at pH = 7 was estimated to be $\Gamma^* = 3.6 \times 10^{-6} \text{ mol/m}^2$.

For more accurate estimation of the standard rate constant the fitting of the experimental with theoretical data is recommended. The procedure is illustrated with the measurements at pH = 5, where a higher standard rate constant is expected compared to the medium at pH = 7. First, the electrode kinetics has been measured with the multi-frequency analysis, as described in our previous study [11]. Figure 7A shows a typical frequency spectrum over the frequency interval from 4 to 400 Hz (asterisks) together with the blank response (triangles). The fitting procedure (circles) reveals the standard rate constant of $k_{\text{sur}} = 18 \text{ s}^{-1}$ (the electron transfer coefficient is set to $\alpha = 0.5$). Conducting the experiment under conditions of MA-SWCA, together with the fitting procedure, leads to the standard rate constant of $k_{\text{sur}} = 12 \text{ s}^{-1}$ (Fig. 7B) confirming that MA-SWCA can reveal the kinetic data of the electrode reaction in a very fast and efficient procedure. These values are in close agreement with the data obtained by Laviron et al. [38], who found the value of 5.7 s^{-1} and 15 s^{-1} for *cis* and *trans* azobenzene isomer, respectively. In the present study an equimolar mixture of both isomers has been used; thus, the estimated value of 12 s^{-1} , is in an excellent agreement with the data of Laviron et al. [38].

Conclusions

Multi-amplitude square-wave chronoamperometry is a novel technique for accessing electrode kinetics by conducting a single experiment in which the height of the potential pulses progressively increases. The outcome of the experiment can be considered in both chronoamperometric and voltammetric contexts, revealing the versatility of the proposed approach. The technique provides a means to identify the amplitude-based quasireversible maximum, which is a common feature of a plethora of electrode mechanisms under conditions of SWV, which is sensitive to the electrode kinetics. Importantly, the maximum can be constructed by conducting a single experiment in MA-SWCA, replacing a series of

experiments needed in conventional SWV, thus reducing the error originating from the variation of the solid electrode surface by repeating the experiment. Another important feature is that the kinetic measurements are conducted at a constant frequency of the pulses, which is of particular importance when complex electrode mechanisms are studied, the response of which is dictated by a series of frequency-related kinetic parameters. For instance, assuming a quasireversible electrode mechanism coupled with a chemical reaction, variation of the frequency in multi-frequency analysis will simultaneously affect the kinetics of both electrode and chemical reactions, resulting in a complex behaviour. On the other hand, MA-SWCA has advantage over its analogous multi-frequency variant, as the variation of the amplitude at a constant frequency affects the electrode kinetics only. The proposed technique provides kinetic information of the electrode processes of both dissolved and immobilized redox couple. Yet, the precision of measurement of the amplitude-based quasireversible maximum for a kinetically controlled electrode reaction of a dissolved redox couple is higher for sluggish electrode reactions, which are associated with well-developed amplitude-based quasireversible maximum, the position of which can be precisely determined. For faster electrode reactions ($k_s > 10^{-2} \text{ cm s}^{-1}$), one should prefer multi-frequency variant over MA-SWCA, because the position of the maximum in multi-frequency experiment for rather fast electrode reactions is yet positioned at relatively low frequency values [11], thus avoiding the influence of uncompensated resistance and charging current. It should be noted that both techniques (MA-SWCA and MF-SWCA) have best performances when $E_m = 0 \text{ V vs } E^0$, which means that the formal potential should be previously known. Initial determination of the formal potential and examination of other basic experimental conditions (i.e., conditions of the electrode, electrolyte solution etc.) must be studied by well-established techniques such as cyclic voltammetry and/or SWV prior to the application of MA-SWCA and MF-SWCA.

It is reasonable to assume that SWCA [1] and its multi-frequency [11] and multi-amplitude variants will find their applications in electrochemical sensors, replacing the simple and frequently applied chronoamperometric protocol at a constant potential. While SWCA generally provides a basis for improved analytical performances, its multi-frequency and multi-amplitude variants enable estimation of kinetic parameters from a single experiment, which is of critical importance for a range of electrochemical sensors (e.g., affinity-based

electrochemical biosensors). Finally, it is plausible to envisage that the current methodology of SWCA will be further developing in a direction of simultaneous multi-frequency and multi-amplitude variations in a single experiment.

Author contributions

DG – Conceptualization, Data curation, Formal Analysis, Methodology, Project administration, Resources, Supervision, Validation, Writing – original draft, Writing – review & editing; LS – Formal Analysis, Investigation, Methodology, Resources, Software, Validation, Visualization, Writing – review & editing; ZZ – Investigation, Data curation; RGC – Writing – review & editing; VM – Conceptualization, Formal Analysis, Funding acquisition, Methodology, Software, Supervision, Writing – original draft, Writing – review & editing

Acknowledgements

VM and DG acknowledges with gratitude the support from the National Science Centre of Poland through the Opus Lap grant no 2020/39/I/ST4/01854.

References

1. D. Jadresko, D. Guziejewski, V. Mirceski, *ChemElectroChem* **2018**, 5, 187.
2. Mirceski, V.; Komorsky Lovrić, Š.; Lovrić, M. *Square-Wave Voltammetry: theory and application*; (Ed.: F. Scholz) Springer-Verlag, Berlin Heidelberg, **2007**.
3. W. M. Smit, M. D. Wijnen, *Recl. Trav. Chim. Pays-Bas* **1960**, 79, 5.
4. V. Mirceski, L. Stojanov, S. Skrzypek, *The Contributions, Sec. Nat. Math. Biotech. Sci.* **2018**, 39, 103.
5. C. Batchelor-McAuley, E. Kätelhön, E. Barnes, R. Compton, E. Laborda, A. Molina, *ChemistryOpen* **2015**, 4, 224.
6. V. Mirceski, D. Guziejewski, L. Stojanov, R. Gulaboski, *Anal. Chem.* **2019**, 91, 14904.
7. V. Mirceski, D. Guziejewski, M. Bozem, I. Bogeski, *Electrochim. Acta* **2016**, 213, 520.
8. V. Mirceski, L. Stojanov, R. Gulaboski, *J. Electroanal. Chem.* **2020**, 872, 114384.
9. L. Stojanov, V. Jovanovski, V. Mirceski, *Electroanalysis* **2021**, 33, 1271.
10. A. Molina, J. González, *Pulse Voltammetry in Physical Electrochemistry and Electroanalysis: theory and applications*; Springer, New York, **2016**.

11. L. Stojanov, D. Guziejewski, M. Puiu, C. Bala, V. Mirceski, *Electrochem. Commun.* **2021**, *124*, 106943.
12. M. Puiu, A. Idili, D. Moscone, F. Ricci, C. Bala, *Chem. Commun.* **2014**, *50*, 8962.
13. M. Puiu, C. Bala, *Curr. Opin. Electrochem.* **2018**, *12*, 13.
14. H. Adamson, A. M. Bond, A. Parkin, *Chem. Commun.* **2017**, *53*, 9519.
15. J. Li, C. L. Bentley, A. M. Bond, J. Zhang, *Anal. Chem.* **2016**, *88*, 2367.
16. A. M. Bond, T. L. E. Henderson, K. B. Oldham, *J. Electroanal. Chem.* **1985**, *191*, 75.
17. A. Neudeck, F. Marken, R. G. Compton, *Electroanalysis* **1999**, *11*, 1149.
18. X. Huang, L. Wang, S. Liao, *Anal. Chem.* **2008**, *15*, 5666.
19. A. Molina, J. González, E. Laborda, R. G. Compton, *J. Electroanal. Chem.* **2015**, *756*, 1.
20. Y. Uchida, E. Kätelhön, R. G. Compton, *J. Electroanal. Chem.* **2017**, *801*, 381.
21. S. J. M. Rosvall, M. Sharp, A. Bond, *J. Electroanal. Chem.* **2002**, *536*, 161.
22. P. Dauphin-Ducharme, N. Arroyo-Curras, M. Kurnik, G. Ortega, H. Li, K. Plaxco, *Langmuir* **2017**, *33*, 4407.
23. D. Guziejewski, *Electroanalysis* **2019**, *31*, 231.
24. V. Mirceski, D. Guziejewski, K. Lisichkov, *Electrochim. Acta* **2013**, *114*, 667.
25. V. Mirceski, M. Lovrić, *J. Electroanal. Chem.* **2001**, *497*, 114.
26. M. Noel, P. N. Anantharaman, *Analyst* **1985**, *110*, 1095.
27. S. Wawrzonek, J. D. Fredrickson, *J. Am. Chem. Soc.* **1955**, *77*, 3985.
28. R. S. Nicholson, M. L. Olmstead, M. L. in *Electrochemistry: Calculations, Simulation and Instrumentation* (Eds.: J. S. Mattson, H. B. Mark, H. C. MacDonald, Marcel Dekker, New York, **1972**, pp. 120–137.
29. V. Mirceski, E. Laborda, D. Guziejewski, R. G. Compton, *Anal. Chem.* **2013**, *85*, 5586.
30. S. Komorsky-Lovrić, M. Lovrić, *J. Electroanal. Chem.* **1995**, *384*, 115.
31. L. M. Peter, W. Durr, P. Bindra, H. Gerischer, *J. Electroanal. Chem.* **1976**, *71*, 31.
32. P. Bindra, H. Gerischer, L. M. Peter, *J. Electroanal. Chem.* **1974**, *57*, 435.
33. B. A. Brookes, R. G. Compton, *J. Phys. Chem. B* **1999**, *103*, 9020.
34. D. Y. Kim, J. Wang, J. Yang, H. W. Kim, G. M. Swain, *J. Phys. Chem. C* **2011**, *115*, 10026.
35. P. H. Daum, C. G. Enke, *Anal. Chem.* **1969**, *41*, 653.
36. S. J. Konopka, B. McDuffie, *Anal. Chem.* **1970**, *42*, 1741.
37. J. L. Sadler, A. J. Bard, *J. Am. Chem. Soc.* **1968**, *90*, 1979.
38. E. Laviron, Y. Mugnier, *J. Electroanal. Chem.* **1980**, *111*, 337.

Figure Captions

Fig. 1. (A) Potential modulation of conventional square-wave chronoamperometry (SWCA) showing the underlying constant mid-potential (E_m) (red line), the duration of a single potential pulse (t_p) and a potential cycle (τ), the height of the pulses (i.e. SW amplitude E_{sw}), and the measuring points of the forward (I_f) and backward (reverse) (I_r) current components. **(B)** Typical chronoamperometric response of SWCA showing forward, reverse and differential (net) current components. **(C)** Typical frequency spectrum of a quasireversible electrode reaction of a dissolved redox couple (circles), surface confined electrode reaction (squares), and EC' catalytic mechanism of a dissolved reversible redox couple (triangles). Each point corresponds to the net current of 50th potential cycle of the SWCA experiment simulated for different frequencies (the upper x-axis displays the duration of a single pulse corresponding to the frequency given at the lower x-axis). **(D)** Multi-amplitude variant of the square-wave chronoamperometry (MA-SWCA) in which the height of the pulses gradually increases in each potential cycle.

Fig. 2. Quasireversible electrode reaction of a dissolved redox couple. **(A)** Typical chronoamperometric response in the course of the MA-SWCA experiment showing the dimensionless current as a function of the serial number m of time increments for the electrode kinetic parameter $\kappa = 0.1$. The amplitude increases from 11 to 305 mV with an increment of 6 mV. The other conditions are: $\alpha = 0.5$, $n = 1$, $T = 298.15$ K, and $E_m = 0$ V vs E^0 . **(B)** Dimensionless current of the net (Ψ_{net}), forward (Ψ_f) and backward (Ψ_b) components as a function of the serial number (p) of potential cycles. **(C)** The dependency of the amplitude normalized net peak (Ψ_{net}/E_{sw}) on the logarithm of the SW amplitude (amplitude-based quasireversible maximum) for different values of the electrode kinetic parameter: $\log(\kappa) = -1.2$ (**1**); -1.0 (**2**) and -0.8 (**3**). **(D)** Amplitude-based quasireversible maximum under conditions of SWCA (circles), MA-SWCA (asterisks), and conventional SWV (triangles) for a sluggish electrode reaction with $\log(\kappa) = -1.2$. The SW chronoamperometric program contains 50 and 100 potential cycles for SWCA and MA-SWCA, respectively. In SWCA each net current corresponds to the last, 50th potential cycle for a given amplitude. The other conditions for panels **(B-D)** are identical as for **(A)**.

Fig. 3. Quasireversible electrode reaction of a dissolved redox couple. **(A)** The effect of the anodic electron transfer coefficient (α) on the position of the amplitude-based quasireversible maximum for $\log(\kappa) = -1$. The values are: $\alpha = 0.35$ (**1**); 0.5 (**2**) and 0.65 (**3**). **(B)** The dependence of the logarithm of the forward current component as a function of the amplitude for electrode kinetic parameter $\kappa = 0.1$ and electron transfer coefficient $\alpha = 0.3$ (**1**); 0.5 (**2**) and 0.7 (**3**).

Fig. 4. Surface confined electrode reaction. Amplitude-based quasireversible maximum under conditions of **(A)** conventional SWCA and **(B)** MA-SWCA for different values of the electrode kinetic parameter. The inset of **(B)** shows the relationship of the critical amplitude associated with the maximum and the electrode kinetic parameter, in a logarithmic form. For both panels the electrode kinetic parameter is: $\log(\omega) = -0.8$ (**1**); -0.4 (**2**); 0 (**3**); 0.4 (**4**) and 0.8 (**5**). The other conditions are: electron transfer coefficient $\alpha = 0.5$, $n = 1$, $T = 298.15$ K, and $E_m = 0$ V vs E^0 . The SW chronoamperometric program contains 50 and 100 potential cycles for panel **(A)** and **(B)**, respectively.

Fig. 5. Hexacyanoferrate redox system in 0.1 mol/L KNO_3 supporting electrolyte at glassy carbon electrode. **(A)** The amplitude-based quasireversible maximum at SW frequency of $f = 25$ Hz under conditions of conventional SWV (asterisks; left ordinate) and MA-SWCA (circles; right ordinate). **(B)** The effect of the frequency on the position of the amplitude-based quasireversible maximum under conditions of MA-SWCA for $f = 25$ (**1**); 50 (**2**) and 100 Hz (**3**). Dashed lines show the polynomial trendlines obtained from experimental results. The other experimental conditions are: bulk concentration of both $[\text{Fe}(\text{CN})_6]^{4-}$ and $[\text{Fe}(\text{CN})_6]^{3-}$ is $c = 0.25$ mmol/L, the mid-potential for MA-SWCA is $E_m = E^0 = 0.233$ V, estimated from the net peak-potential of conventional SWV. The step potential increment in SWV is $\Delta E = 5$ mV.

Fig. 6. Azobenzene electrode reaction at HMDE in BR buffers. The amplitude-based quasireversible maximum at SW frequency of $f = 25$ Hz in buffers at pH = 4 (**1**), 6 (**2**) and 7 (**3**). **(B)** The effect of the frequency on the position of the amplitude-based quasireversible maximum at pH = 7 for $f = 25$ (**1**); 50 (**2**) and 100 Hz (**3**). The other experimental conditions

are: bulk concentration of azobenzene $c = 2 \times 10^{-6}$ mol/L, accumulation time is 60 s at potential of 0.00 V applied prior to the application of MA-SWCA. The amplitude is gradually increasing from 10 to 200 mV. The mid-potential is $E_m = E^0$ (azobenzene), estimated from the net peak-potential of conventional SWV.

Fig. 7. Azobenzene electrode reaction at HMDE in a BR buffer at pH = 5. Fitting of the experimental and theoretical data. **(A)** Multi-frequency analysis: Frequency-based quasireversible maximum of experimental (asterisks, left ordinate) and theoretical data (circles, right ordinate), simulated for standard rate constant $k_s = 18 \text{ s}^{-1}$ and amplitude of $E_{sw} = 25 \text{ mV}$. **(B)** Multi-amplitude analysis: Amplitude-based quasireversible maximum of experimental (asterisks, left ordinate) and theoretical data (circles, right ordinate), simulated for standard rate constant $k_s = 12 \text{ s}^{-1}$ and frequency of $f = 25 \text{ Hz}$. The triangles in both panels refer to the blank experimental response. The other conditions of simulations for both panels are: electron transfer coefficient $\alpha = 0.5$, number of electrons $n = 2$, temperature $T = 298.15 \text{ K}$, and number of potential cycles is 100. The other experimental conditions are identical as for Fig. 4.

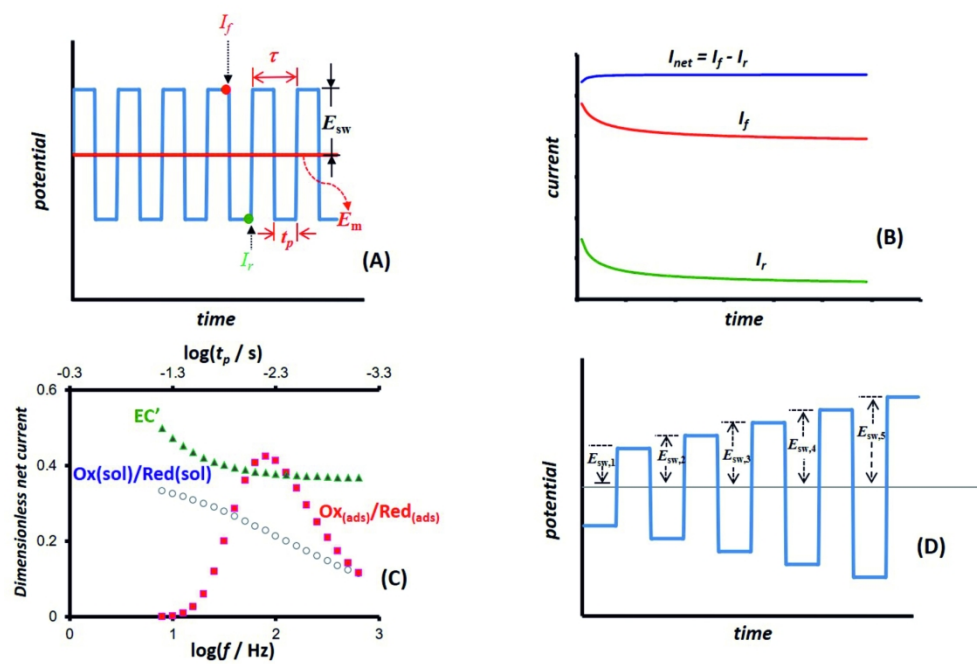


Fig. 1

160x107mm (300 x 300 DPI)

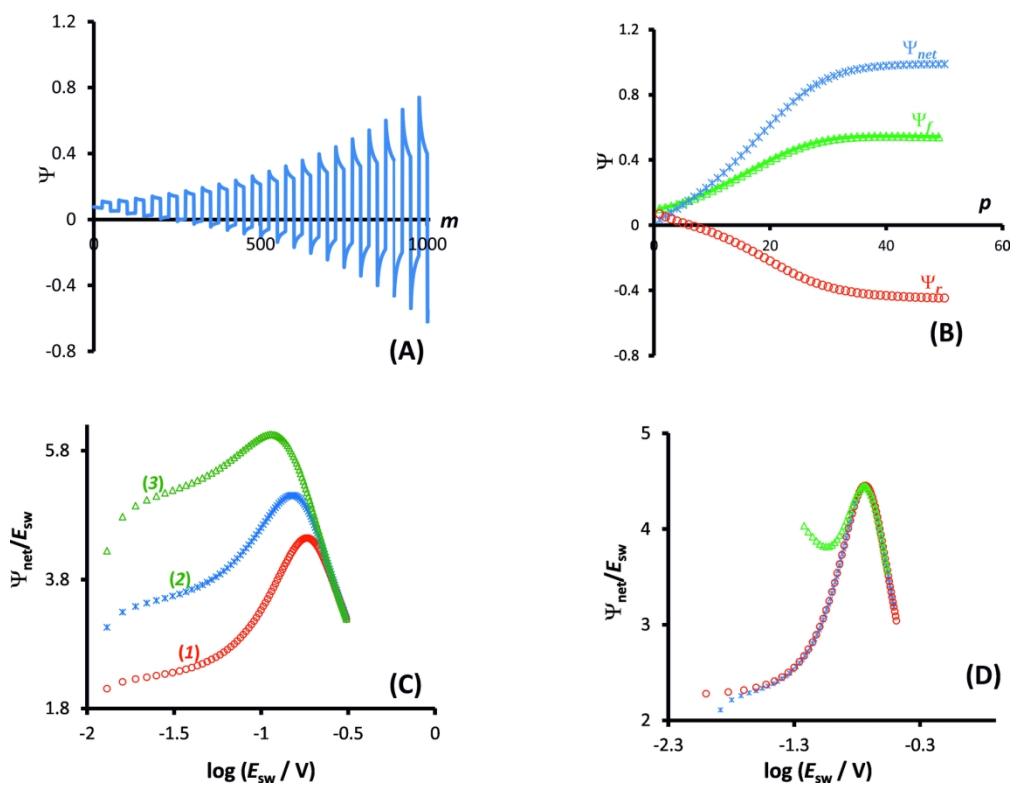


Fig. 2

160x124mm (300 x 300 DPI)

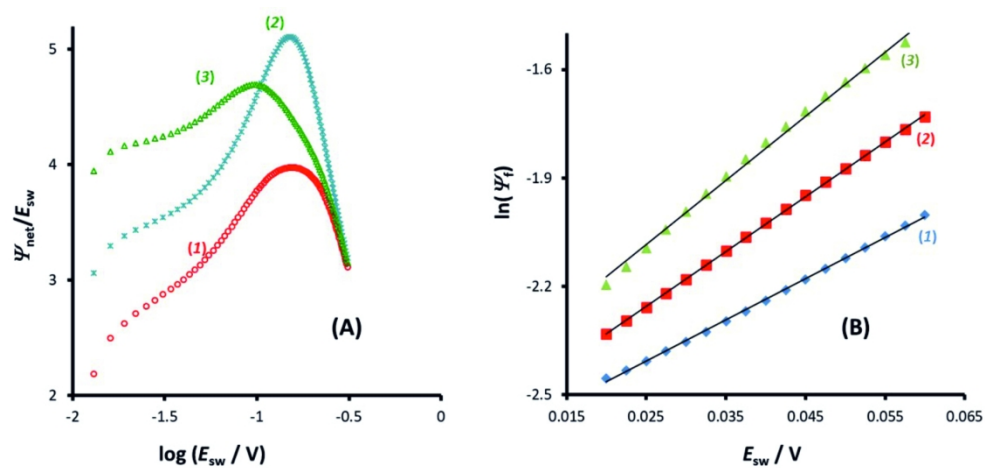


Fig. 3

160x75mm (300 x 300 DPI)

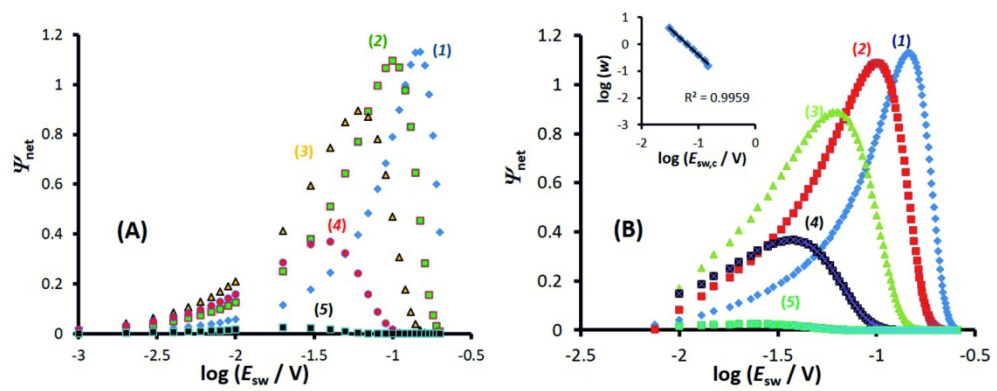


Fig. 4

160x63mm (300 x 300 DPI)

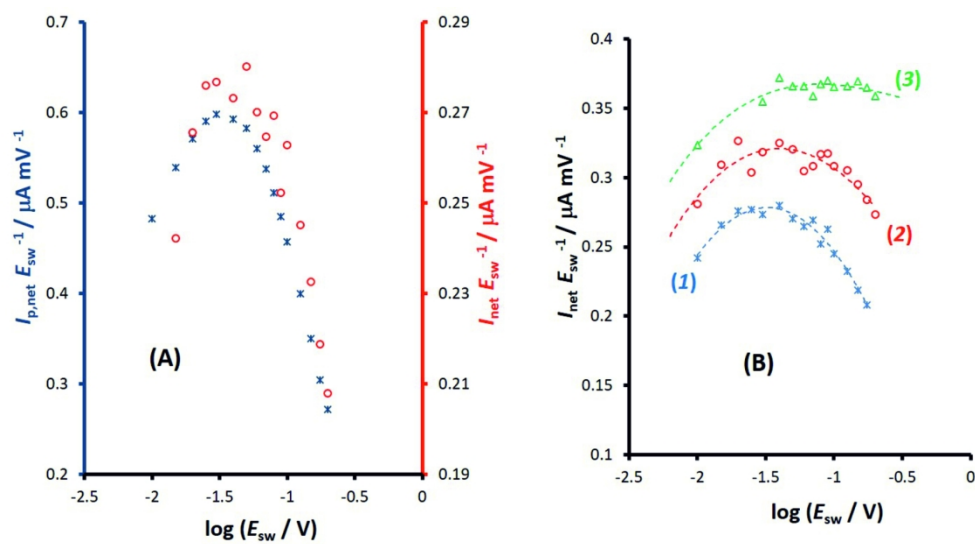


Fig. 5

160x87mm (300 x 300 DPI)

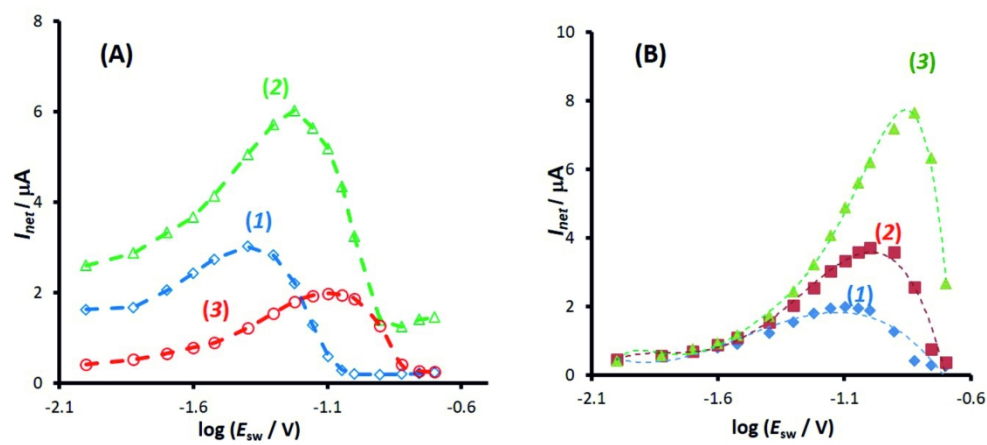


Fig. 6

160x73mm (300 x 300 DPI)

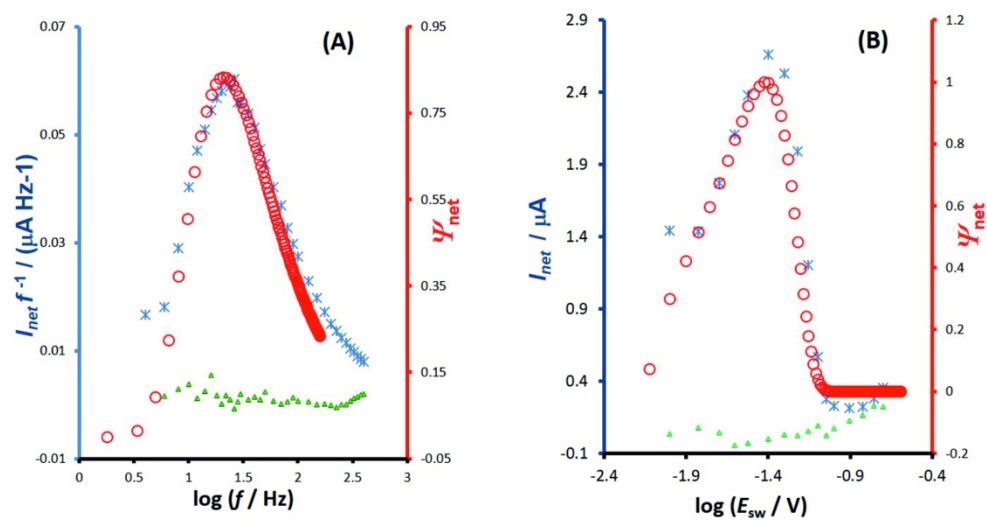


Fig. 7

160x84mm (300 x 300 DPI)